


### BRIDLE

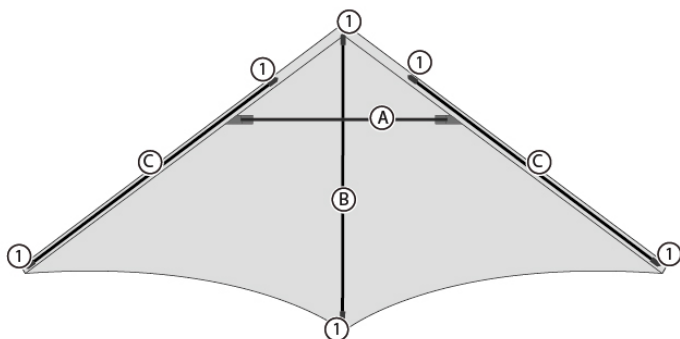

### MATERIAL

### BASIC DATA

| WIND RANGE   | OPT. WIND |
|--------------|-----------|
| 8 - 38 KM/H  | KM/H      |
| 5 - 24 MPH   | MPH       |
| 2 - 5 BFT.   | BFT.      |
| 4 - 21 KNOT. | KNOT.     |

| SIZE | cm  | inch |
|------|-----|------|
|      | 210 | 82,7 |
|      | 98  | 38,6 |
|      | g   | oz   |


| FLYING LINE  |              |
|--------------|--------------|
| 45 - 60 kp   | 60 - 100 m   |
| 90 - 130 lbs | 195 - 325 ft |

| SAIL              |
|-------------------|
| Ripstop-Polyester |

### HINTS

Age: 10+

Lubricate the ball-bearing swivel on the spiral with a little oil from time to time. This makes it spin easier and last longer.

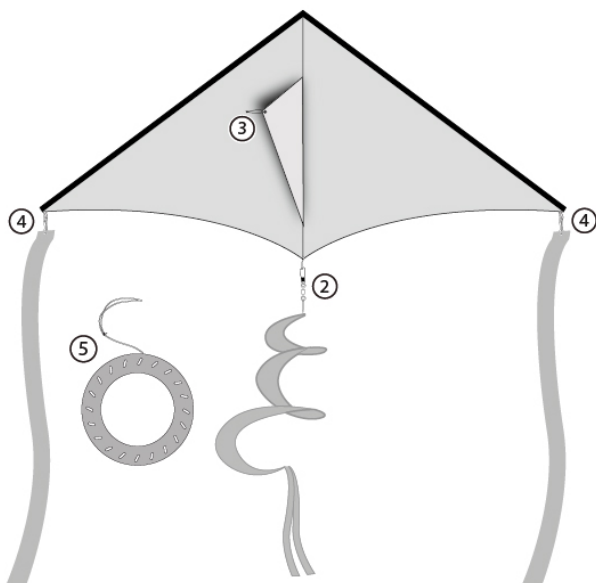

### PARTS

| IREM NUM.. | ITEM NAME                               | NUM. |
|------------|---|------|
| 144550     | 1) HQ Endcap, moulded, ø5,5 mm          | 6    |
| 123760     | 2) Carabiner with ball bearing, 36 kg   | 1    |
|            | 3) Adapter for flying line              | 1    |
| 121550     | 4) Simplex hooks to attach the tails    | 2    |
|            | 5) Spool with flying line, 60 m / 45 kp | 1    |

### FRAME

| ITEM NUM. | ITEM NAME                                   | NUM. | LENGTH [mm] |
|-----------|---|------|-------------|
| G06125    | A) Spreader: fiberglass tube 6.0 x 125 cm   | 1    | 830         |
| G06125    | B) Spine: Fiberglass tube 6.0 x 125 cm      | 1    | 970         |
| G06125    | C) Leading edge: fiberglass tube 6 x 125 cm | 2    | 1080        |

### PRODUCT INTRODUCTION

März 2022

### PRODUCT CLEARING