
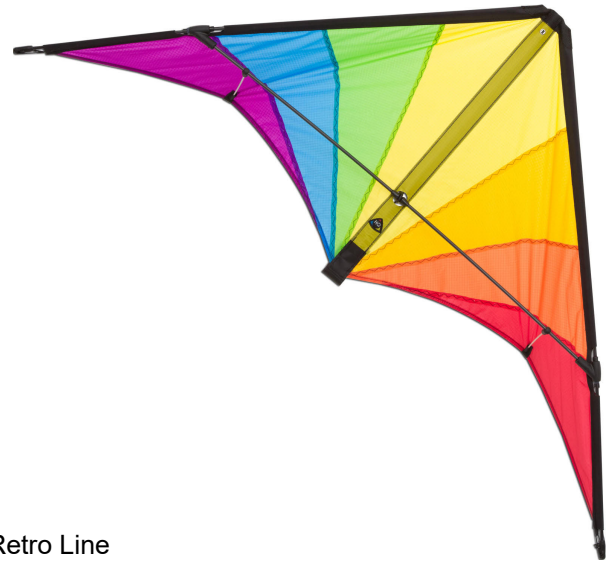


29.04.2021 12:11:36

**BRIDLE**

**DELTA\_FLIZZ\_RETRO**

115098

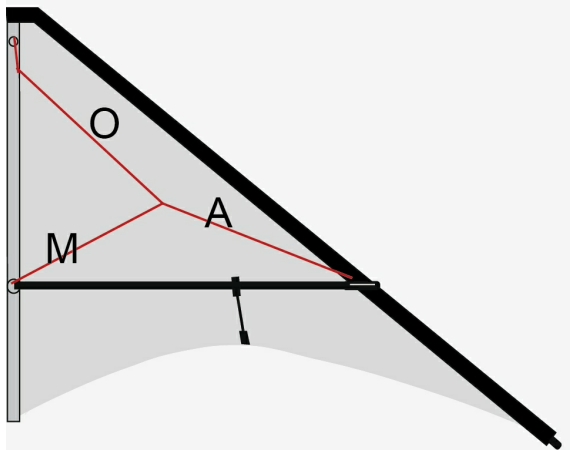

O = 55,5cm ; M = 46 cm ; A = 37 cm

**MATERIAL**  
Sleeved Dyneema 65kp

Retro Line

**INFOS**

**CATEGORY**

- Begine
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

**WIND RANGE**

15 - 68 KM/H  
9 - 42 MPH  
3 - 8 BFT.  
8 - 37 KNOT.

**OPT. WIND**

40 KM/H  
25 MPH  
6 BFT.  
22 KNOT.

**FLYING LINE**

40 - 80 kp      20 - 30 m  
80 - 170lbs    65 - 95 ft

**DIMENSIONS**

	cm	inch
	108	42,5
	50	19.7
	g	oz



**HINTS & TIPPS**

**SAIL MATERIAL**

Ripstop Nylon

**INCLUDED**

- HQ Retro Line Quiver
- Sticker HQ-Kites
- Pin HQ Kites
- Instructions

**PRODUCT INTRODUCTION** — **PRODUCT CLEARING**

Januar 2012

**FRAME**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Lower Spreader	ø5 mm Carbon Spar	1	710
	Spine	ø3 mm Solid Fiberglas	1	470
	Leadingedge	ø5 mm Carbon Spar	2	720
	Standoff	ø2 mm Solid Fiberglas Rod	2	125

**PARTS**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144200	Standoff	HQ Endcap, moulded, ø2 mm	4
144300	Spine	HQ Endcap, moulded, ø3 mm	2
144500	Leadingedge	HQ Endcap, moulded, ø5 mm	2
	Spine/Lower Spreader	O-Ring Rubber	1
153425	Leadingedge	HQ LE-Connector ø5 mm angled	2
153650	Lower LE	HQ Split Nock ø5 mm	2
153493	Leadingedge/Spine	C-Clip 5 mm	4
995582	Spinetip	Spinetip Fitting	1
153414	Lower Spreader	HQ Stand Off Connector small (2,5 - 4 mm)	2
		HQ Stand Off Connector small (2,5 - 4 mm)	
		HQ Endcap, moulded, ø4 mm	