


BRIDLE

CRUISER AQUA

116511

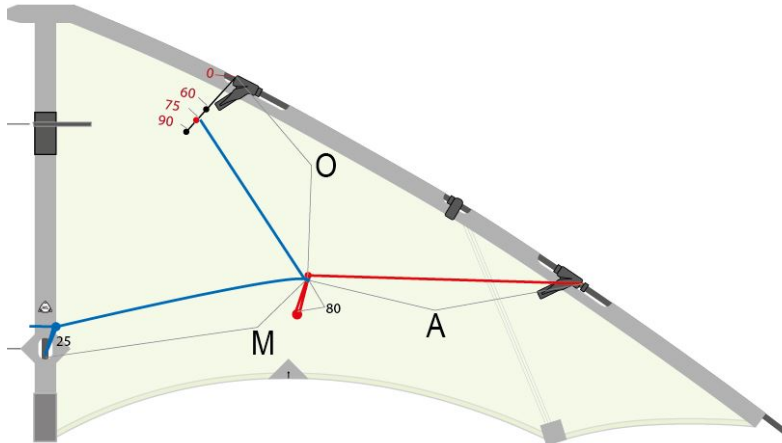

O = 630 mm ; M = 650 mm ; A = 660 mm
(Knotadapter middle knot = standard)


MATERIAL
100 kp sleeved Dyneema

INFOS

KATEGORIE	<input checked="" type="checkbox"/> Beginner	12 - 60 KM/H	25 KM/H
	<input checked="" type="checkbox"/> Advanced	7 - 37 MPH	16 MPH
<input type="checkbox"/> Master	3 - 7 BFT.	4 BFT.	
<input type="checkbox"/> Allround	6 - 32 KNOT.	13 KNOT.	
<input type="checkbox"/> Trick			
<input checked="" type="checkbox"/> Traction			
<input type="checkbox"/> Precision			
<input type="checkbox"/> Freestyle			
<input type="checkbox"/> Team			
<input type="checkbox"/> Low Wind			

SCHNUR	
60 - 100 kp	25 - 30 m
130 - 210 lbs	80 - 95 ft

ABMESSUNGEN	
cm	inch
194	76,4
74	29,1
g	oz
443	15,6



HINTS & TIPPS
2017

SAIL MATERIAL
70D Polyester RipStop

INCLUDED ACCESSORIES
Winderset with straps
Dyneema flying lines
2 x 30 m | 85 kp

Sportkite bag
Sportkite Guide
Productinformation

PRODUCT INTRODUCTION — **PRODUCT CLEARING**
Januar 2020

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	Ø8 mm fiberglass tube	1	615
	Upper Spreader	Ø8 mm fiberglass tube	1	514
	Lower Spreader	Ø8 mm fiberglass tube	2	680
	Upper LE	Ø8 mm fiberglass tube	2	700
	Lower LE	Ø8 mm fiberglass tube	2	485
	Sailbatten	Ø4 mm fiberglass tube	2	365
	Standoff	Ø2 mm fiberglass solid rod	2	175
	Plugs	Ø8 mm fiberglass tube	2	100

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
	Spine and leadingedge	Endcap 8 mm	4
	Standoff	Endcap 2 mm	2
	Sailbatten	Endcap 4 mm	2
	Lower LE	Splitnock 8 mm	2
	Leadingedge	Leading edge connector 8 mm	4
	Spine/Lower Spreader	Centre-T 8 mm	1
	Spine & leading edge	Stopper clip 8 mm	9
	Lower Spreader	HQ standoff connector big	4
	Trailing edge	Standoff screw fitting 2 mm	2