


**BRIDLE**

**ION**

116601xx

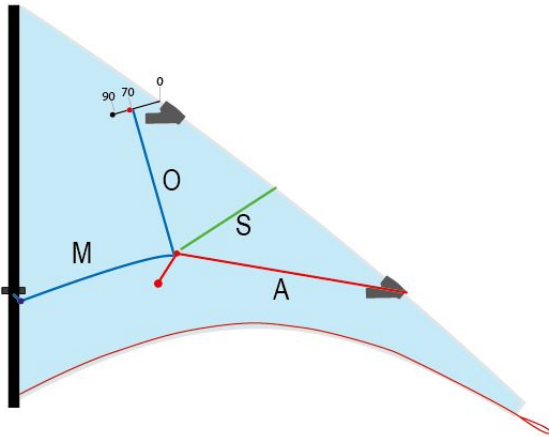

O = 47cm ; M = 48,5cm ; A = 47cm

**MATERIAL**  
70 kp corded Dyneema

Best Seller Allround

**INFOS**

**CATEGORY**

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

**WIND RANGE**

10 - 60 KM/H  
6 - 37 MPH  
2 - 7 BFT.  
5 - 32 KNOT.

**OPT. WIND**

20 KM/H  
12 MPH  
4 BFT.  
11 KNOT.

**FLYING LINE**

45 - 75 kp    20 - 30 m  
90 - 160lbs    65 - 95 ft

**DIMENSIONS**

	cm	inch
	205	80,7
	85	33,5
	304 g	10,7 oz



**HINTS & TIPPS**

**SAIL MATERIAL**

Ripstop Polyester

**INCLUDED**

HQ Sportkites Quiver  
Flyinglines: Dyneema 60kp, 2x 25m on winder  
Flyingstraps

**PRODUCT INTRODUCTION** — **PRODUCT CLEARING**

Januar 2015

**FRAME**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	ø6 mm Carbon Spar	1	770
	Lower Spreader	ø6 mm Carbon Spar + Plug *1)	2	650
	Plug low Spreader	Plug ø4 mm Solid Fiberglas	2	150
	Upper Spreader	ø6 mm Hybrid Spar	1	497
	Upper LE	ø6 mm Hybrid Spar	2	650
	Lower LE	ø6 mm Hybrid Spar	2	650
	Inner Standoff	ø3 mm Solid Fiberglas	2	228
	Outer Standoff			230

1) plug has to be glued into the lower spreader (Center-T end)

**PARTS**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144550	Leading Edge/Spine	HQ Endcap, moulded, ø5,5 mm	3
153426	Leading Edge	HQ LE-Connector ø6 mm angled	4
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	4
160060	Center T	Center-T Exel 6 mm	1
153429	Lower Leading Edge	HQ Ferrule ø6 mm (Fiberlas Reinforced)	2
153660	Upper Leading Edge	HQ Split Nock ø6 mm	2
153422	Spinetip	Spinetip T-Joint ø6 mm	1
153495	Leading Edge	C-Clip 6 mm	10