


BRIDLE

SALSA_II_ROT

116736

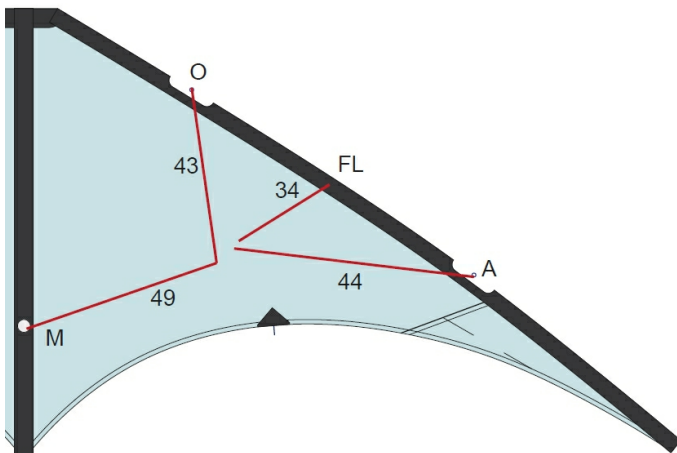

O = 43 cm ; M = 49 cm ; A = 44 cm ; FL = 34 cm

MATERIAL
65 kp corded Dyneema

Best Seller Allround

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

WIND RANGE	OPT. WIND
6 - 38 KM/H	20 KM/H
4 - 24 MPH	12 MPH
2 - 5 BFT.	4 BFT.
3 - 21 KNOT.	11 KNOT.

FLYING LINE

30 - 60 kp	20 - 25 m
60 - 130 lbs	65 - 80 ft

DIMENSIONS

	cm	inch
	180	70,9
	91	35,8
	237 g	8,4 oz



HINTS & TIPPS

SAIL MATERIAL

Ripstop Nylon

INCLUDED

HQ Sportkites Quiver
Flying Lines: Dyneema 45 kp, 2x 20 m on winder
Flying Straps

PRODUCT INTRODUCTION — **PRODUCT CLEARING**

Januar 2009

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø5 mm Hybrid Spar	1	435
	Lower Spreader	ø5 mm Carbon Spar *1)	2	600
	Spine	ø5 mm Hybrid Spar	1	700
	Upper LE	ø5 mm Hybrid Spar	2	625
	Lower LE	ø5 mm Hybrid Spar	2	625
	Standoff	ø2 mm Solid Fiberglas Rod	2	190
	Plug lower Spreader	ø3 mm Solid Fiberglas Rod	2	80

1) The lower spreader needs a plug (reinforcement) on center-T side

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153414	Standoff/Spreader	HQ Stand Off Connector small (2,5 - 4 mm)	2
144500	Leading Edge/Spine	HQ Endcap, moulded, ø5 mm	3
144200	Standoff	HQ Endcap, moulded, ø2 mm	2
160050	Center-T	Center-T Exel ø5 mm	1
153425	Leading Edge	HQ LE-Connector ø5 mm angled	4
153493	Leading Edge	C-Clip 5 mm	7
153650	Lower Leading Edge	HQ Split Nock ø5 mm	2
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153421	Spinetip	Spinetip T-Joint ø5 mm	1