


16.12.2020 13:02:03

BRIDLE

HQ TREK

116777

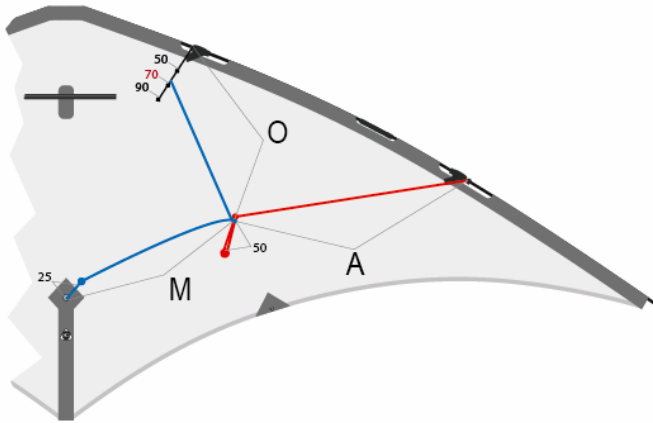

O = 60 cm ; M = 57,5 cm (25 cm + 55 cm) ; A = 59 cm

MATERIAL
Sleeved Dyneema 70 kp

INFOS

KATEGORIE <input checked="" type="checkbox"/> Beginner <input checked="" type="checkbox"/> Advanced <input type="checkbox"/> Master <input checked="" type="checkbox"/> Allround <input type="checkbox"/> Trick <input type="checkbox"/> Traction <input checked="" type="checkbox"/> Precision <input checked="" type="checkbox"/> Freestyle <input type="checkbox"/> Team <input type="checkbox"/> Low Wind	WINDBEREICH		OPT. WIND	
	10 - 45	KM/H	24	KM/H
	6 - 28	MPH	15	MPH
	2 - 6	BFT.	4	BFT.
	5 - 24	KNOT.	13	KNOT.
SCHNUR				
25 - 100	kp	20 - 35	m	
50 - 210	lbs	65 - 115	ft	

ABMESSUNGEN

	cm	inch	SPEED
197	77,6		
	cm	inch	POWER
86	33,9		
	g	oz	
311	11		

HINTS & TIPPS

SAIL MATERIAL

Rip-Stop-Polyester 70D

INCLUDED ACCESSORIES

PRODUCT INTRODUCTION — PRODUCT CLEARING

Januar 2020

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	Ø6 mm hybrid tube	1	735
	Upper LE	Ø6 mm hybrid tube	2	645
	Lower LE	Ø6 mm hybrid tube	2	645
	Upper Spreader	Ø6 mm hybrid tube	1	450
	Lower Spreader	Ø6 mm carbon tube	2	650
	Standoff	Ø3 mm wrapped fiberglass	2	255
	Plugs lower spreader	Ø4 mm solid fiberlass	2	80
	Plugs leading edge	Ø4 mm solid fiberlass	4	60

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
160060	Center-T	Center-T Exel ø6 mm	1
153426	Leadingedge	HQ LE-Connector ø6 mm angled	4
153429	Upper LE	HQ Ferrule ø6 mm (Fiberlas Reinforced Plastic)	2
153495	Leadingedge/Spine	C-Clip 6 mm	8
153415	Lower Spreader	HQ Stand Off Verbinder (3,5-5,5 mm)	2
153422	Spine	Spinetip T-Joint ø6 mm	1
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	2
144550	Leadingedge/Spine	HQ Endcap, moulded, ø5,5 mm	3
144300	Standoff	HQ Endcap, moulded, ø3 mm	2
153660	Lower LE	HQ Split Nock ø6 mm	2