


26.04.2021 10:21:26

BRIDLE

TRAMONTANA 2001 HP

117301HP

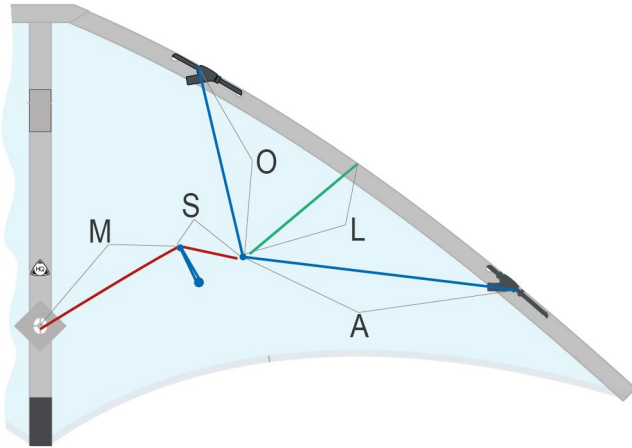

O = 70 cm ; M = 81 cm ; A = 78 cm ; S = 16 cm ; L = 61 cm

MATERIAL
Corded Dyneema 96 kp

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

8 - 35 KM/H
5 - 22 MPH
2 - 5 BFT.
4 - 19 KNOT.

OPT. WIND

15 KM/H
9 MPH
3 BFT.
8 KNOT.

FLYING LINE

30 - 100 kp 20 - 40 m
60 - 210 lbs 65 - 130 ft

DIMENSIONS

	cm	inch
	224	88,2
	123	48,4
	300 g	10,6 oz

SPEED



POWER



FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
135994	Leading Edge	G -Force Super Duper Skinny	4	82,5
a60100	Spine	carbon AVIA .2300 1m	1	100
a60082	upp. spreader	carbon AVIA .2300 0,825m	1	55,5
135980	low. spreader	carbon AVIA .2300	2	82,5
130350	inner standoff	fiberglas rod, black, 3mm	2	25,5
130350	outer standoff	fiberglas rod, black, 3mm,	2	21,5
130105	sail batten	fiberglas rod, 2,1mm	2	18,5

HINTS & TIPPS

SAIL MATERIAL

VENTEX

INCLUDED

PRODUCT INTRODUCTION — PRODUCT CLEARING

März 2000

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
135988	Leading Edge	G-Force APA connector "B"	4
153660	Wingtip	HQ nock 6mm	2
135914	Center T	Avia alu-sleeve `230/5,9mm	1
153407	Center T	HQ-connector 5,9mm	1
153416	Standoff/Spreader	standoff connector 5,5-6,3mm	4
153410	outer Standoff/Sail	standoff clip 2mm	2
153412	inner Standoff/Sail	standoff clip 2mm	2
135914	leading edge	avia alu-sleeve `230/5,9mm	2
135982	low. spreader	G-force ferrule solid 10cm CFLS,.285"	2
153490	Spine/Upper Spreader	rubber ring 10/4mm	1