


27.04.2021 15:40:11

BRIDLE

TRION

117331

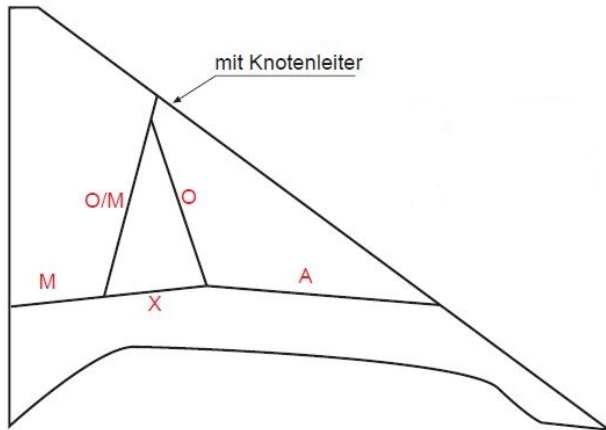

O = 82 cm ; M = 82 cm ; A = 83 cm ; O/M = 59 cm ; X = 44 cm

MATERIAL
96 kp sleeved Dyneema

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

5 - 35 KM/H
3 - 22 MPH
1 - 5 BFT.
3 - 19 KNOT.

OPT. WIND

KM/H
MPH
BFT.
KNOT.

FLYING LINE

70 - 145 kp 25 - 35 m
150 - 310 lbs 80 - 115 ft

DIMENSIONS

cm inch
255 100,4
112 44,1
g oz
326 11,5



HINTS & TIPPS

SAIL MATERIAL

VENTEX light

INCLUDED

PRODUCT INTRODUCTION — PRODUCT CLEARING

Januar 2005

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Leadingedge	Skyshark P200	4	825
	Spine	Skyshark P200 (82,5 cm + 12,5 cm)	1	950
	Upper Spreader	Skyshark P200	1	650
	Lower Spreader	Dynamik T15	2	825
	Inner Standoff	Ø3 mm solid fiberglass	2	260
	Outer Standoff	Ø3 mm solid fiberglass	2	240
	Sailbatten	Ø2.1 mm solid fiberglass (P21)	2	70

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153426	Leadingedge	HQ LE-Connector ø6 mm angled	4
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	4
850063	Center-T	Center-T Dynamics	1
144550	Leadingedge/Spine	HQ Endcap, moulded, ø5,5 mm	3
153413		HQ Stand Off Clip 3mm	4
153498	Leadingedge	C-Clip 8 mm	6
135977		Skinny inner ferrule tube 8 cm CFL,,240"	3
135978		Skinny inner ferrule solid 10 cm	1
153660	Lower LE	HQ Split Nock ø6 mm	3