


22.04.2021 13:41:05

BRIDLE

E-MOTION

117350

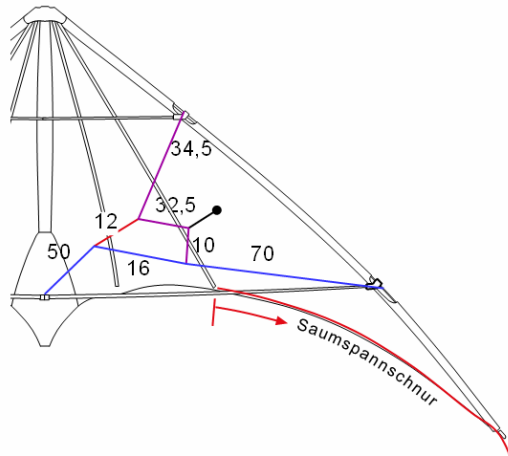

MATERIAL
65 kp sleeved Dyneema

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

4 - 28 KM/H
2 - 17 MPH
1 - 4 BFT.
2 - 15 KNOT.

OPT. WIND


KM/H
MPH
BFT.
KNOT.

FLYING LINE

25 - 75 kp 20 - 35 m
50 - 160lbs 65 - 115 ft

DIMENSIONS

cm inch
222 87,4
106 41.7
g oz



HINTS & TIPPS

SAIL MATERIAL

VENTEX light / Mylar

INCLUDED

PRODUCT INTRODUCTION — **PRODUCT CLEARING**

Januar 2004

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	Ø6 mm carbon spar, avia .230	1	600
	Spine	Ø6 mm carbon spar, avia .230	1	750
	Lower Spreader	Ø6 mm carbon spar, avia .230, with plug	2	750
	Upper LE	G-Force UL	2	825
	Lower LE	Ø6 mm carbon spar, avia .230	2	725
	Inner Standoff	Ø2 mm solid carbon	2	210
	Outer Standoff	Ø2.1 mm solid wrapped fiberglass	2	240
	Plugs lower	Ø3 mm solid Fiberglass	2	50

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144500		HQ Endcap, moulded, ø5 mm	4
144200	Standoff	HQ Endcap, moulded, ø2 mm	4
153410	Standoff / Sail	HQ 2mm Stand Off Clip flat	4
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	4
153495		C-Clip 6 mm	4
153498		C-Clip 8 mm	3
135200	Leadingedge Ferrule	connection ferrule G-ForceUL / 6 mm	3
160060	Center-T	Center-T Exel ø6 mm	2
135974		G - Force APA Conector "Db"	3
135988		G - Force APA Conector "B"	3
153660	Lower LE	HQ Split Nock ø6 mm	3