
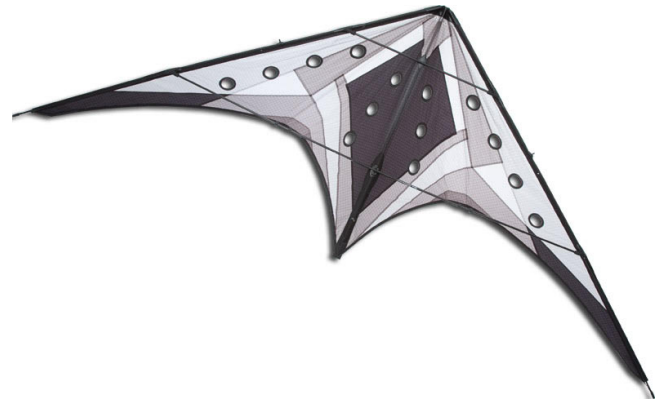


BRIDLE

INFINITY VENTED

117368

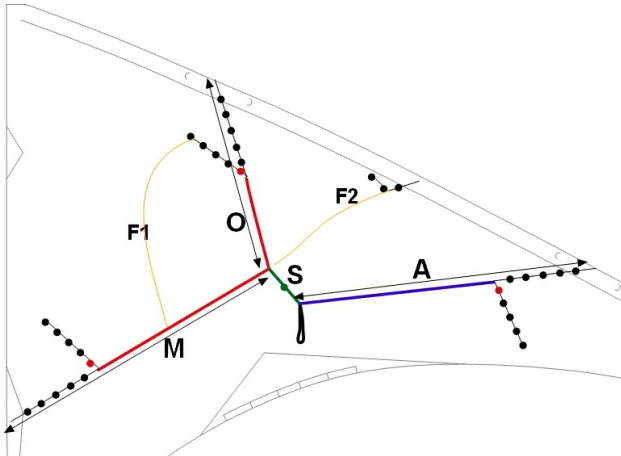

O = 54 cm ; M = 62 cm ; A = 53 cm ; S = 5 cm ; F1 = 47 cm ; F2 = 50 cm

MATERIAL
Sleeved Dyneema 96kp

Trick & Competition

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

15 - 38 KM/H
9 - 24 MPH
3 - 5 BFT.
8 - 21 KNOT.

OPT. WIND

25 KM/H
16 MPH
4 BFT.
13 KNOT.

FLYING LINE

45 - 70 kp 25 - 40 m
90 - 150lbs 80 - 130 ft

DIMENSIONS

cm inch
246 96,9
96 37,8
g oz
392 13,8



HINTS & TIPPS

SAIL MATERIAL

ICAREX PC31 Ripstop Polyester

INCLUDED

HQ Sportkites Quiver
Instructions

PRODUCT INTRODUCTION

Januar 2009

PRODUCT CLEARING

Januar 2011

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	Dynamic D15 (cylindric spar; Plugs on both ends)	1	520
850067	Lower Spreader	Dynamic DT15, 82.5cm (Plugs on thin end)	2	755
	Spine	Dynamic D15 (cylindric spar)	1	900
850067	Upper LE	Dynamic DT15, 82.5cm	2	825
850067	Lower LE	Dynamic DT15, 82.5cm	2	695
	Inner Standoff	ø3 mm Solid Carbon Rod	2	260
	Outer Standoff	ø3 mm Solid Carbon Rod	2	250
850062	1) Innenmuffe	Inner Ferrul f. Dynamic Spars (ø6.2 mm) Solid		
	2) Innenmuffe	Inner Ferrul f. Dynamic Spars (ø6.2 mm) Tube		

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144300	Upper Leading Edge	HQ Endcap, moulded, ø3 mm	4
144700	Spine Nose	Endcap ø7 mm	1
144800	Leadingedge Nose	Endcap ø8 mm	2
153419	Standoff Sail Connector	Stand Off Clip, screwed ø3 mm	4
153416	Standoff Spreader	HQ Stand Off Connector big (5,5-6,3mm)	4
153660	Lower LE	HQ Split Nock ø6 mm	2
153608	Leadingedge	Yoyo Stopper ø7.8 mm (Skyshark +	2
153426	Leadingedge/Spine	HQ LE-Connector ø6 mm angled *1)	6
	Spinetip	Tuning Weight 16g	1
	Spinetip	Spinetip End Fitting	1
850063	Spine	Center-T Dynamics	1
153498	Leadingedge	C-Clip 8 mm	10

*1) the upper LE-connector has to be drilled with a 7 mm drill for the upper spreader