
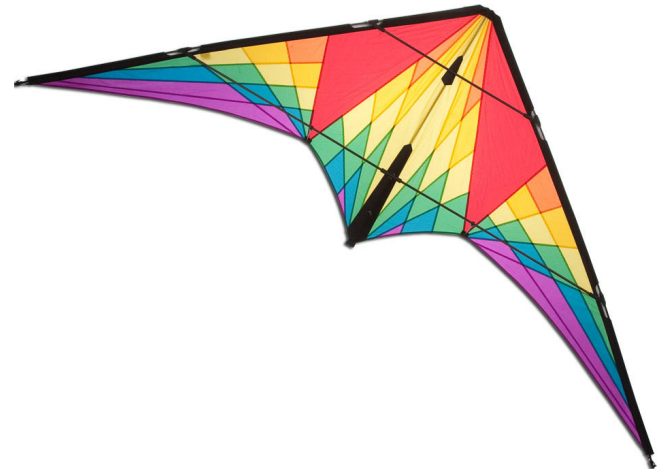


**BRIDLE**

**SILENT\_DART\_RETRO**

117400

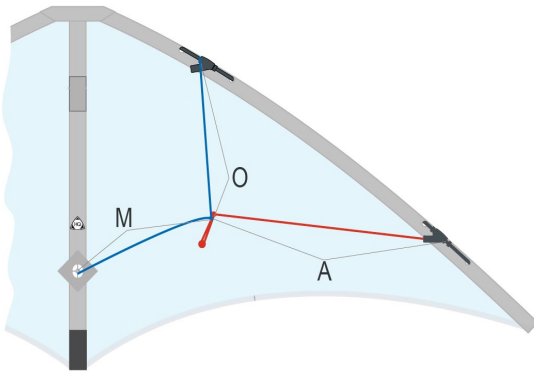

O = 53 cm ; M = 60 cm ; A = 60 cm

**MATERIAL**  
130kp sleeved Dyneema

Retro Line

**INFOS**

**CATEGORY**

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

**WIND RANGE**

6 - 50 KM/H  
4 - 31 MPH  
2 - 7 BFT.  
3 - 27 KNOT.

**OPT. WIND**

25 KM/H  
16 MPH  
4 BFT.  
13 KNOT.

**FLYING LINE**

100 - 135 kp    25 - 40 m  
210 - 290 lbs    80 - 130 ft

**DIMENSIONS**

cm    inch  
257    101,2  
107    42,1  
g    oz  
484    17,1



**HINTS & TIPPS**

**SAIL MATERIAL**

Ripstop Nylon

**INCLUDED**

HQ Sportkites Quiver "Retro Line"  
HQ Pin; HQ Sticker;  
Instructions

**PRODUCT INTRODUCTION**

Januar 2010

**PRODUCT CLEARING**

**FRAME**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø8 mm Carbon Spar	1	645
	Lower Spreader	ø8 mm Carbon Spar + Plug *1)	2	825
	Spine	ø8 mm Carbon Spar	1	920
	Upper LE	ø8 mm Carbon Spar + Plug *1) + Ferrule	2	825
	Lower LE	ø8 mm Carbon Spar + Plug *1)	2	825
	Standoff	ø3 mm Solid Fiberglas Rod	2	185
	1) Plug	ø8 mm Solid Fiberglas Rod	6	100

**PARTS**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144300	Standoff	HQ Endcap, moulded, ø3 mm	2
144700	Leadingedge/Spine	Endcap ø7 mm	3
	Lower LE	Split Nock ø8 mm	2
	Leadingedge	Leading Edge Connector ø8 mm	4
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	2
160080	Spine	Center-T Exel ø8 mm	1
	Spine	Spinetip Fitting *1)	1
153498	Leadingedge/Spine	C-Clip 8 mm	8
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	2

\*1) 6mm T-Connector on a ø6 mm solid fiberglas rod (9 cm), that is pushed into the lower end of the spine