


**BRIDLE**

**CRACKERJACK**

117460

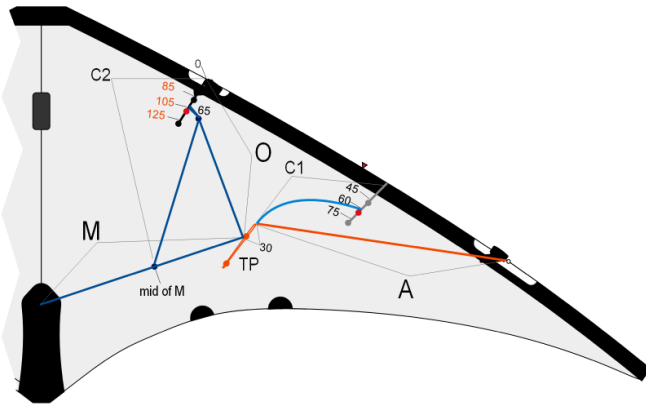

O = 570; M = 605; A = 580; C1 = 480; C2 = 520; TP = 100

**MATERIAL**  
100kp Sleeved Dyneema

Trick & Competition

**INFOS**

**KATEGORIE**

Beginner  
 Advanced  
 Master  
 Allround  
 Trick  
 Traction  
 Precision  
 Freestyle  
 Team

**WINDBEREICH** — **OPT. WIND**

6 - 30 KM/H	16 KM/H
4 - 19 MPH	10 MPH
2 - 5 BFT.	3 BFT.
3 - 16 KNOT.	9 KNOT.

**SCHNUR**

40 - 80 kp	20 - 25 m
80 - 170 lbs	65 - 80 ft

**ABMESSUNGE**

cm	inch
240	94,5
95	37,4

**WEIGHT**

g	oz
334	11,8

**SPEED** 0 to 100 scale  
**POWER** 0 to 100 scale

**HINTS & TIPPS**

**SAIL**  
ICAREX PC31 Ripstop Polyester

**INCLUDED**

**PRODUCT INTRODUCTION** — **PRODUCT CLEARING**  
Februar 2012

**FRAME**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
850064	Spine	ø6 mm Carbon Spar	1	855
	Spine	Skyshark P100 or P200	1	100
	Lower Spreader	Dynamic T18, 82.5cm	1	810
	Lower Spreader	Plug 6mm Solid Fiberglass	2	110
	Upper Spreader	ø6 mm Carbon Spar	1	535
	Upper LE	ø6 mm Carbon Spar + Plug *1)	2	825
	Lower LE	ø6 mm Carbon Spar	2	680
	Plug LE	*1) 4 mm Solid Fiberglass	2	80
	Inner Standoff	ø3 mm Solid Carbon	2	240
	Outer Standoff	ø3 mm Solid Carbon	2	245

**PARTS**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
	Spinetip	Weight 9g 40mm Steel ø4 or 45mm copper	1
144550	Leading Edge/Spine	HQ Endcap, moulded, ø5,5 mm	3
153416	Standoff/Spreader	HQ Stand Off Connector big (5,5-6,3mm)	4
153356	Center-T	HQ Center-T (Chrome)	1
153660	Lower Leading Edge	HQ Split Nock ø6 mm	2
153495	Leading Edge/Spine	C-Clip 6 mm	9
144300	Standoff	HQ Endcap, moulded, ø3 mm	4
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	4
153606	Leadingedge	Yoyo Stopper ø6 mm	2
144800	Spine	Endcap ø8 mm	1
153426	Leadingedge	HQ LE-Connector ø6 mm angled	4
135914	Leadingedge	Avia Alu Ferrule ø`230 / ø5.9 mm	2
850062	Center-T	Inner Ferrul f. Dynamic Spars (ø6.2 mm)	1