
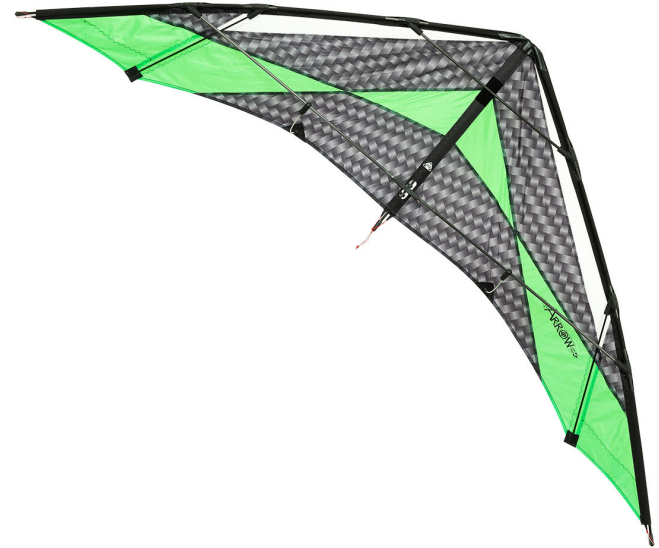


BRIDLE

HQ ARROW M

117481

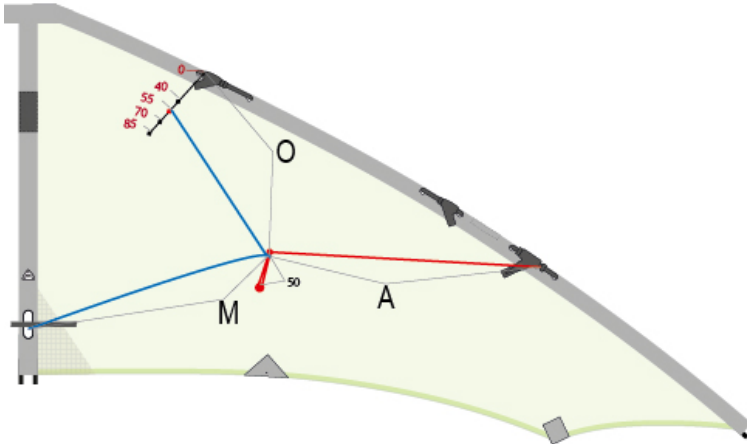

O = 52,5 cm ; M = 54,5 cm ; A = 45,5 cm

MATERIAL
Sleeved Dyneema 100 kp

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

12 - 49 KM/H
7 - 30 MPH
3 - 6 BFT.
6 - 26 KNOT.

OPT. WIND


30 KM/H
19 MPH
5 BFT.
16 KNOT.

FLYING LINE

50 - 100 kp 25 - 35 m
110 - 210 lbs 80 - 115 ft

DIMENSIONS

cm inch
174 68,5
64 25,2
g oz
256 9



HINTS & TIPPS

SAIL MATERIAL

Rip-Stop-Polyester 70D

INCLUDED

PRODUCT INTRODUCTION — **PRODUCT CLEARING**

Januar 2020

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	Ø6 mm carbon tube	1	490
	Leadingedge	Ø6 mm carbon tube	2	1046
	Upper Spreader	Ø6 mm carbon tube	1	417
	Lower Spreader	Ø6 mm carbon tube	23	575
	Standoff	Ø2.1 mm wrapped fiberglass	2	146
	Sailbatten	Ø4 mm carbon tube	2	323
	Plugs lower	Ø4 mm carbon tube	2	100

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
160060	Center-T	Center-T Exel ø6 mm	1
153426	Leadingedge	HQ LE-Connector ø6 mm angled	6
153495	Leadingedge/Spine	C-Clip 6 mm	12
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	2
153660	Lower LE	HQ Split Nock ø6 mm	2
144550	Leadingedge/Spine	HQ Endcap, moulded, ø5,5 mm	3
144200	Standoff	HQ Endcap, moulded, ø2 mm	2
144400	Sailbatten	HQ Endcap, moulded, ø4 mm	2