


19.04.2021 11:58:42

**BRIDLE**

**FAZER DESERT**

11748505

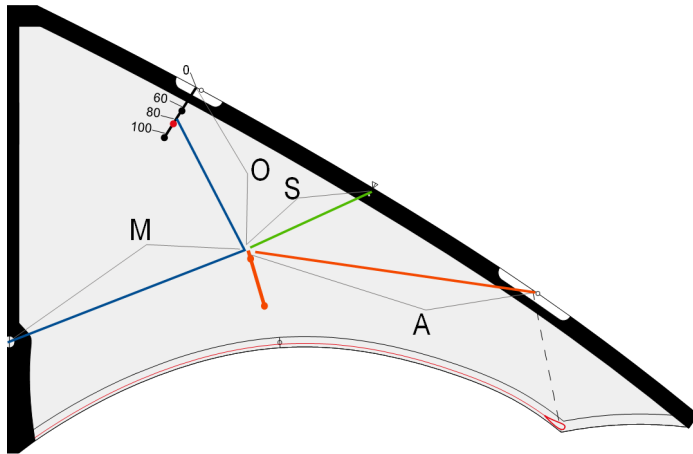

O = 58 cm ; M = 68.5 cm ; A = 58 cm ; S = 51.5 cm

**MATERIAL**  
70kp corded Dyneema

Speed & Power

**INFOS**

**KATEGORIE**

Beginner  
 Advanced  
 Master  
 Allround  
 Trick  
 Traction  
 Precision  
 Freestyle  
 Team

**WINDBEREICH** — **OPT. WIND**

|              |          |
|--------------|----------|
| 6 - 60 KM/H  | 30 KM/H  |
| 4 - 37 MPH   | 19 MPH   |
| 2 - 7 BFT.   | 5 BFT.   |
| 3 - 32 KNOT. | 16 KNOT. |

**SCHNUR**

|               |             |
|---------------|-------------|
| 80 - 120 kp   | 25 - 35 m   |
| 170 - 260 lbs | 80 - 115 ft |

**FRAME**

| ITEM NUM. | MOUNTING POSITION   | ITEM NAME                 | # | LENGTH |
|-----------|---------------------|---------------------------|---|--------|
|           | Spine               | ø6 mm Carbon Spar         | 1 | 650    |
|           | Lower Spreader      | ø8 mm Carbon Spar         | 2 | 750    |
|           | Plug lower Spreader | ø6 mm Solid Fiberglas Rod | 2 | 80     |
|           | Upper Spreader      | ø6 mm Carbon Spar         | 1 | 523    |
|           | Leadingedge         | ø6 mm Carbon Spar         | 2 | 1230   |
|           | Sailbatten          | ø3 mm Solid Fiberglas Rod | 2 | 197    |
|           | Standoff            | ø2 mm Solid Fiberglas Rod | 2 | 150    |

**ABMESSUNGE**

|  |     |      |                          |
|--|-----|------|--------------------------|
|  | cm  | inch | <b>SPEED</b><br>0 to 100 |
|  | 207 | 81,5 |                          |
|  | cm  | inch | <b>POWER</b><br>0 to 100 |
|  | 72  | 28.3 |                          |
|  | g   | oz   |                          |
|  | 310 | 10,9 |                          |

**HINTS & TIPPS**

xxx

**SAIL**

70D Ripstop Polyester

**INCLUDED**

HQ Sportkites Quiver  
 Flyinglines: Dyneema 100kp, 2x 30m on winder  
 Flying Straps

**PARTS**

| ITEM NUM. | MOUNTING POSITION    | ITEM NAME                              | # |
|-----------|----------------------|--|---|
| 144550    | Leadingedge/Spine    | HQ Endcap, moulded, ø5,5 mm            | 4 |
| 153426    | Upper LE             | HQ LE-Connector ø6 mm angled           | 2 |
| 153426    | Lower LE             | HQ LE-Connector ø6 mm angled           | 2 |
| 153416    | Lower Spreader       | HQ Stand Off Connector big (5,5-6,3mm) | 4 |
| 160060    | Spine/Lower Spreader | Center-T Exel ø6 mm                    | 1 |
|           |                      |  | 2 |
| 153495    | Leadingedge/Spine    | C-Clip 6 mm                            | 7 |
| 144200    | Standoff             | HQ Endcap, moulded, ø2 mm              | 2 |
| 144300    | Sailbatten           | HQ Endcap, moulded, ø3 mm              | 4 |
| 153418    | Trailingedge         | Stand Off Clip, screwed ø2.5 mm        | 2 |
| 153660    | Leadingedge          | HQ Split Nock ø6 mm                    | 2 |

**PRODUCT INTRODUCTION** — **PRODUCT CLEARING**

Januar 2011