


12.11.2019 10:29:41

BRIDLE

Calypso II Radical

112324

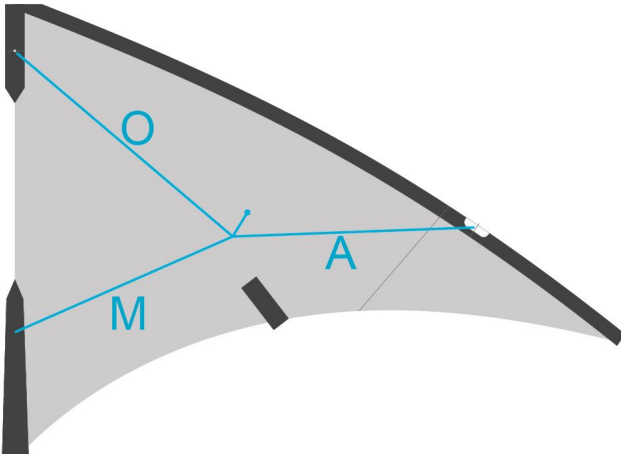

O = 43 cm ; M = 37 cm ; A = 56 cm (Gleitschenkel)
(A1 = 30 cm ; A2 = 26 cm)

MATERIAL
Corded Polyester 40 daN

Beginner (Beach & Fun)


INFOS

KATEGORIE	<input checked="" type="checkbox"/> Beginner	6 - 38 KM/H	25 KM/H
	<input type="checkbox"/> Advanced	4 - 24 MPH	16 MPH
<input type="checkbox"/> Master	2 - 5 BFT.	4 BFT.	
<input type="checkbox"/> Allround	3 - 21 KNOT.	13 KNOT.	
<input type="checkbox"/> Trick			
<input type="checkbox"/> Traction			
<input type="checkbox"/> Precision			
<input type="checkbox"/> Freestyle			
<input type="checkbox"/> Team			
<input type="checkbox"/> Low Wind			
SCHNUR		15 - 25 kp	15 - 25 m
		30 - 50 lbs	45 - 80 ft

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Lower Spreader	ø4 mm Fiberglas Spar	1	780
	Spine	ø4 mm Fiberglas Spar	1	480
	Leadingedge	ø4 mm Fiberglas Spar	2	780
	Standoff	ø2 mm Solid Fiberglas Rod	2	280

ABMESSUNGEN

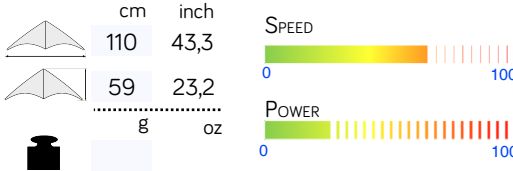

HINTS & TIPPS

Empty box for hints and tips.

SAIL MATERIAL

Ripstop Polyester

INCLUDED ACCESSORIES

Quiver
Flyinglines: Polyester 2 x 20 m, 20 kp on spools
Instructions

PRODUCT INTRODUCTION

PRODUCT CLEARING

Januar 2010

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144400	Leadingedge/Spine	HQ Endcap, moulded, ø4 mm	4
153414	Lower Spreader	HQ Stand Off Connector small (2,5 - 4 mm)	2
153424	Leadingedge	HQ LE-Connector ø4 mm angled	2
153490	Spine	Rubber Ring ø10/4 mm	1
153610	Lower Spreader	HQ Spreader Connector "Bone" 4 mm	1
144200	Standoff	HQ Endcap, moulded, ø2 mm	4
153492	Leadingedge	C-Clip 4 mm	4
153640	Leadingedge	HQ Split Nock ø4 mm	2
153612	Spine/Lower Spreader	HQ Spreader Connector "Bone" ø5 mm	1