


12.12.2018 09:39:46

BRIDLE

Fellow

117365

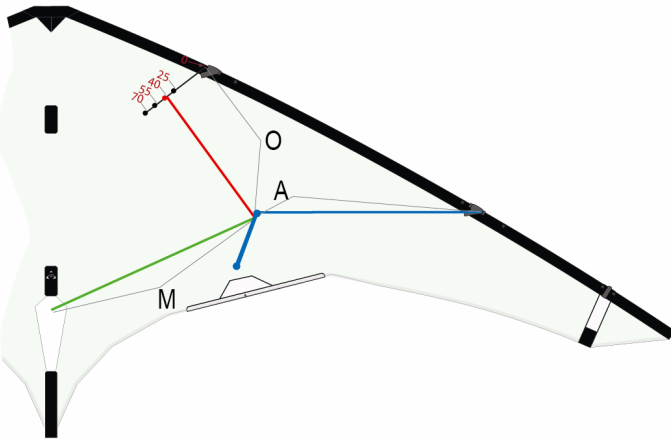

O = 675 mm | M = 700 mm | A = 590 mm

MATERIAL
100 daN sleeved Dyneema

INFOS

KATEGORIE

- Beginner
- Advanced
- Master
- Allround
- Trick
- Traction
- Precision
- Freestyle
- Team
- Low Wind

WINDBEREICH | **OPT. WIND**

6 - 35	KM/H		KM/H
4 - 22	MPH		MPH
2 - 5	BFT.		BFT.
3 - 19	KNOT.		KNOT.

SCHNUR

50 - 100	kp	30 - 40	m
110 - 210	lbs	95 - 130	ft

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø6 mm carbon tube	1	630
	Lower Spreader	ø6 mm carbon tube	2	825
	Spine	ø6 mm carbon tube	1	985
	Upper LE	ø6 mm carbon tube	2	825
	Lower LE	ø6 mm carbon tube	2	825
	Standoff	ø3 mm solid carbon	2	295
	Sailbatten	ø3 mm solid fiberglass (wrapped)	2	132
	Plugs L. Spreader	ø4 mm solid fiberglass @ center-T	2	250
	Plug LE	ø4 mm solid fiberglass @ ferrule side	2	80

ABMESSUNGEN

	cm	inch
250	98,4	
	cm	inch
112	44,1	
	g	oz

SPEED 0 to 100 scale

POWER 0 to 100 scale

HINTS & TIPPS

Empty box for hints and tips.

SAIL MATERIAL

ICAREX PC31 - Polyester RipStop

INCLUDED ACCESSORIES

Empty box for included accessories.

PRODUCT INTRODUCTION

PRODUCT CLEARING

Empty box for product introduction and clearing.

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
	Spine/Lower Spreader	center-T Exel 6/6 mm	1
153426	Leadingedge	HQ LE-Connector ø6 mm angled	4
153416	Standoff/Spreader	HQ Stand Off Connector big (5,5-6,3mm)	2
153419	Standoff/Sail	Stand Off Clip, screwed ø3 mm	2
	Spinetip	Tuning Weights	
	Spine Nose	Endcap 6 mm	1
	Upper LE	Endcap 6 mm	2
153660	Lower LE	HQ Split Nock ø6 mm	2