


BRIDLE

BOLERO_HOT

112360

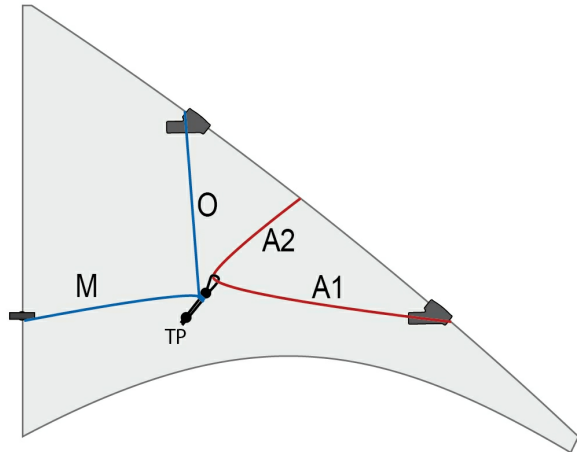

O = 45 cm ; M = 45 cm ; A1 = 41 cm + A2 = 35 cm (sliding leg)
MATERIAL
 Polyester 40 kp; black

INFOS

KATEGORIE	WINDBEREICH	OPT. WIND
<input checked="" type="checkbox"/> Beginner	6 - 38 KM/H	20 KM/H
<input type="checkbox"/> Advanced	4 - 24 MPH	12 MPH
<input type="checkbox"/> Master	2 - 5 BFT.	4 BFT.
<input checked="" type="checkbox"/> Allround	3 - 21 KNOT.	11 KNOT.
<input type="checkbox"/> Trick		
<input type="checkbox"/> Traction		
<input type="checkbox"/> Precision		
<input type="checkbox"/> Freestyle		
<input type="checkbox"/> Team		
ABMESSUNGE	SCHNUR	
cm	30 - 50 kp	20 - 25 m
inch	60 - 110 lbs	65 - 80 ft
163		
64,2		
83		
32,7		
g		
oz		

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø5 mm fiberglass tube	1	455
	Lower Spreader	ø5 mm hybrid tube	1	1100
	Spine	ø5 mm fiberglass tube	1	650
	Leadingedge	ø5 mm fiberglass tube	2	1160
	Standoff	ø2 mm solid fiberglass	2	250

ABMESSUNGE

cm	inch	SPEED
163	64,2	
83	32,7	POWER
g	oz	

HINTS & TIPPS

Empty box for hints and tips.

SAIL

Ripstop-Polyester 70D

INCLUDED

Flying lines blendline 45 kp, 2 x 20 m,
 on winder with straps
 HQ sportkite bag
 instructions

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144200	Standoff	HQ Endcap, moulded, ø2 mm	2
144400		HQ Endcap, moulded, ø4 mm	4
144500	Upper LE	HQ Endcap, moulded, ø5 mm	2
153650	Lower LE	HQ Split Nock ø5 mm	2
153410	Trailingedge	standoff clip 2mm	2
153490	Spine/Lower Spreader	Rubber Ring ø10/4 mm	1
153612	Spine/Lower Spreader	HQ Spreader Connector "Bone" ø5 mm	1
153415	Lower Spreader	HQ Stand Off Verbinder (3,5-5,5 mm)	2
153425	Leadingedge	HQ LE-Connector ø5 mm angled	4
153493	Leadingedge	C-Clip 5 mm	5

PRODUCT INTRODUCTION

Januar 2007

PRODUCT CLEARING

Dezember 2010