


05.10.2020 07:48:33

BRIDLE

LIMBO_II_LAVA

112380

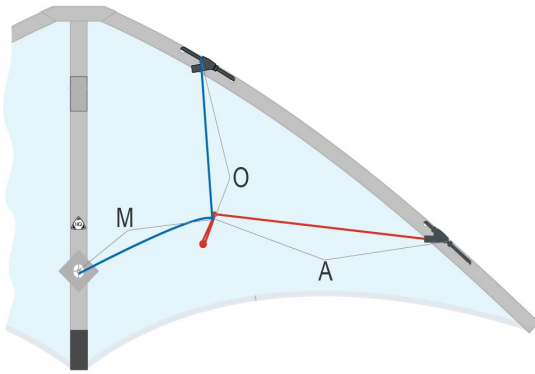

O = 48 cm ; M = 48 cm ; A = 48 cm

MATERIAL
70 kp corded Dyneema

INFOS

KATEGORIE

- Beginner
- Advanced
- Master
- Allround
- Trick
- Traction
- Precision
- Freestyle
- Team
- Low Wind

WINDBEREICH

10 - 49	KM/H	25	KM/H
6 - 30	MPH	16	MPH
2 - 6	BFT.	4	BFT.
5 - 26	KNOT.	13	KNOT.

OPT. WIND






SCHNUR

30 - 70	kp	20 - 30	m
60 - 150	lbs	65 - 95	ft

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	Ø5 mm fiberglas tube	1	575
	Upper Spreader	Ø5 mm fiberglas tube	1	400
	Lower Spreader	Ø5 mm fiberglas tube	2	1000
	Leadingedge	Ø5 mm fiberglas tube	2	1000
	Standoff	Ø2 mm solid fiberglas	2	173

ABMESSUNGEN

	cm	inch	SPEED
155	61		
	cm	inch	POWER
67	26,4		
	g	oz	
195	6,9		

HINTS & TIPPS

SAIL MATERIAL

70D RipStop Polyester

INCLUDED ACCESSORIES

Flugleine: 40kp; 2 x 20m Polyester on winder
Flying Straps
Bag
HQ Sportkite Guide

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153414	Lower Spreader	HQ Stand Off Connector small (2,5 - 4 mm)	2
153612	Lower Spreader	HQ Spreader Connector "Bone" ø5 mm	1
144500	Leadingedge/Spine	HQ Endcap, moulded, ø5 mm	3
153490	Upper Spreader	Rubber Ring ø10/4 mm	1
153460	Lower Spreader	Rubber Ring ø6/4 mm	1
153421	Spinetip	Spinetip T-Joint ø5 mm	1
153425	Leadingedge	HQ LE-Connector ø5 mm angled	4
153493	Leadingedge	C-Clip 5 mm	6
153650	Lower LE	HQ Split Nock ø5 mm	2
144200	Standoff	HQ Endcap, moulded, ø2 mm	2
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2

PRODUCT INTRODUCTION

PRODUCT CLEARING

Januar 2015