


BRIDLE

VENTO_1

116040

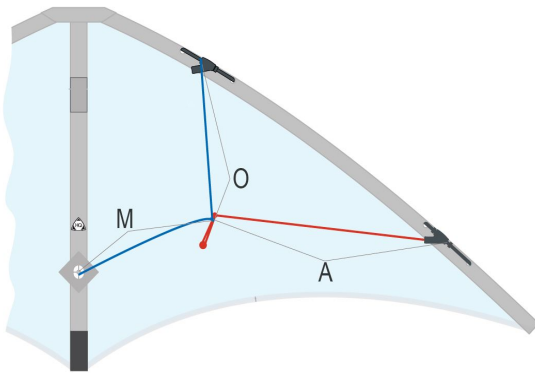

O= 50 M= 52 A= 46

MATERIAL
60 kp corded Dyneema

INFOS

FRAME

CATEGORY	<input checked="" type="checkbox"/> Begine	WIND RANGE	OPT. WIND
	<input checked="" type="checkbox"/> Advance	6 - 38 KM/H	15 KM/H
<input type="checkbox"/> Master	4 - 24 MPH	9 MPH	
<input type="checkbox"/> Allroun	2 - 5 BFT.	3 BFT.	
<input type="checkbox"/> Trick	3 - 21 KNOT.	8 KNOT.	
<input type="checkbox"/> Traction			
<input type="checkbox"/> Precision			
<input type="checkbox"/> Freestyl	FLYING LINE		
<input type="checkbox"/> Tea	25 - 45 kp	20 - 25 m	
<input type="checkbox"/> Low	50 - 90 lbs	65 - 80 ft	

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
a50115	leading edge	Ø5 mm carbontube avia .1960	2	1150
a50115	spine	Ø5 mm carbontube avia .1960	1	800
a50082	upp. spreader	Ø5 mm carbontube avia .1960	2	500
a50082	low. spreader	Ø5 mm carbontube avia .1960	1	350
130105	standoff	Ø2.1 mm fiberglasrod wrapped	4	232

DIMENSIONS	cm	inch	SPEED
	165	65	
	85	33.5	POWER
	188	6,6	

HINTS & TIPPS
Nice for beginners in light wind areas. Very forgiving, slow flying kite, very little pull. Does tricks and precision as well

SAIL MATERIAL
Polyester VENTEX light

INCLUDED

PRODUCT INTRODUCTION — **PRODUCT CLEARING**
Februar 1998

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153405	Upper Leading Edge	HQ connector 5 mm	1
153405	Lower Leading Edge	HQ connector 5 mm	2
153650	Lower Leading Edge	HQ nock 5 mm	2
153460	Center T	rubber ring	1
144500	Spinetip	endcap 5 mm	1
153415	Standoff/Spreader	standoff connector 3.5 - 5.5 mm	4
153412	Standoff/Sail	standoff clip/tipp	4