


25.11.2019 09:11:06

## BRIDLE

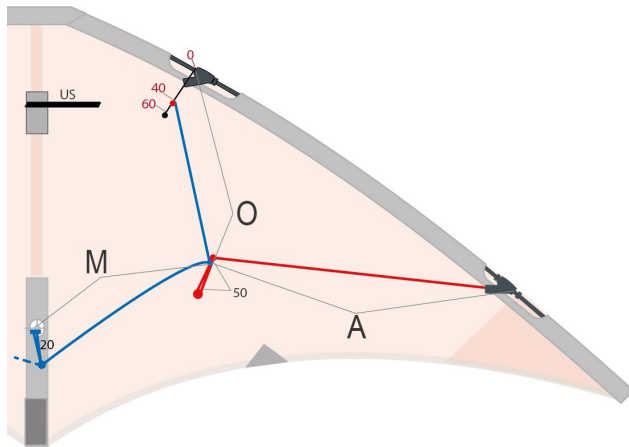

O = 560 mm ; M = 525 mm ; A = 530 mm

**MATERIAL**  
70 kp Polyester

## STINGER

116520



### INFOS

<b>KATEGORIE</b> <input checked="" type="checkbox"/> Beginner <input type="checkbox"/> Advanced <input type="checkbox"/> Master <input type="checkbox"/> Allround <input type="checkbox"/> Trick <input type="checkbox"/> Traction <input type="checkbox"/> Precision <input type="checkbox"/> Freestyle <input type="checkbox"/> Team <input type="checkbox"/> Low Wind	<b>WINDBEREICH</b>		<b>OPT. WIND</b>	
	15 - 40	KM/H	20	KM/H
	9 - 25	MPH	12	MPH
	3 - 6	BFT.	4	BFT.
	8 - 22	KNOT.	11	KNOT.
<b>SCHNUR</b>				
30 - 60	kp	20 - 30	m	
60 - 130	lbs	65 - 95	ft	

### ABMESSUNGEN

	cm	inch	<b>SPEED</b> 
164	64,6		
	cm	inch	<b>POWER</b> 
70	27,6		
	g	oz	
251	8,9		

### HINTS & TIPPS

2017  
special feature: windbags on the tips for noisereduced flying.

### SAIL MATERIAL

70D RipStop-Polyester

### INCLUDED ACCESSORIES

Winderset with straps  
Polyester flying lines  
2 x 25 m | 40 kp

Sportkite bag  
Sportkite Guide  
Productinformation sheet

### PRODUCT INTRODUCTION

Februar 2017

### PRODUCT CLEARING

### FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	Ø6 mm fiberglass tube	1	615
	Upper Spreader	Ø6 mm fiberglass tube	1	440
	Lower Spreader	Ø6 mm fiberglass tube	1	1100
	Leadingedge	Ø6 mm fiberglass tube	2	1050
	Standoff	Ø2 mm fiberglass solid rod	2	205

### PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
	Leadingedge/Spine	Endcap 6 mm	4
	Standoff/Spreader	Endcap 2 mm	2
	Lower LE	HQ Splitnock 6 mm	2
	Leadingedge	HQ Leading edge connector 6 mm	4
	Center-T	HQ "Bone" T-Piece 6 mm	1
	Lower Spreader	HQ Standoff Connector	2
	Trailingedge	Standoff screw fitting 2 mm	2
	Center-T	O-Ring 10/4 mm	1
	Spine and Leadingedge	Stopper clip 6 mm	6