


15.04.2021 16:17:47

BRIDLE

ATOMIC

116600xx

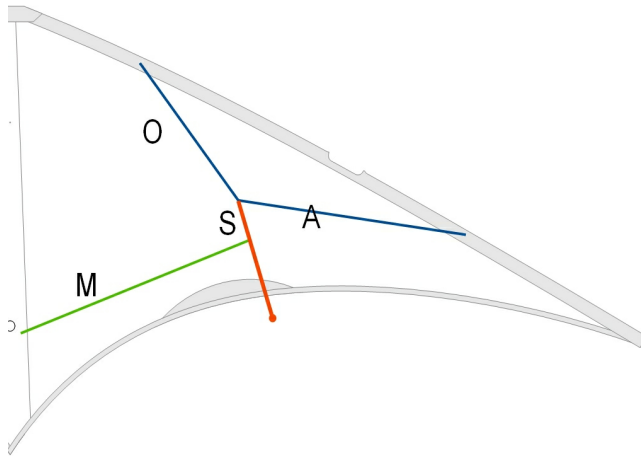

O = 44cm ; M = 50 cm ; A = 59 cm ; S = 4 cm

MATERIAL
45kp corded polyester, prestretched

Best Seller Allround

INFOS

KATEGORIE

Beginner
 Advanced
 Master
 Allround
 Trick
 Traction
 Precision
 Freestyle
 Team

WINDBEREICH — **OPT. WIND**

10 - 49 KM/H	20 KM/H
6 - 30 MPH	12 MPH
2 - 6 BFT.	4 BFT.
5 - 26 KNOT.	11 KNOT.

SCHNUR

45 - 75 kp	20 - 30 m
90 - 160 lbs	65 - 95 ft

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	ø6 mm Carbon Spar	1	790
	Lower Spreader	ø6 mm Carbon Spar + Plug *1)	2	700
	Plug low Spreader	Plug ø4 mm Solid Fiberglas	2	80
	Upper Spreader	ø6 mm Hybrid Spar	1	500
	Upper LE	ø6 mm Hybrid Spar	2	700
	Lower LE	ø6 mm Hybrid Spar	2	700
	Standoff	ø3 mm Solid Fiberglas	2	250

1) plug has to be glued into the lower spreader (Center-T end)

ABMESSUNGE

	cm	inch	SPEED 0 100
	218	85,8	
	cm	inch	POWER 0 100
	92	36.2	
	g	oz	
	330	11,6	

HINTS & TIPPS

SAIL

Ripstop Polyester

INCLUDED

HQ Sportkites Quiver
 Flyinglines: Dyneema 60kp, 2x 25m on winder
 Flyingstraps

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144550	Leading Edge/Spine	HQ Endcap, moulded, ø5,5 mm	3
153426	Leading Edge	HQ LE-Connector ø6 mm angled	4
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	4
160060	Center T	Center-T Exel 6 mm	1
153429	Lower Leading Edge	HQ Ferrule ø6 mm (Fiberlas Reinforced)	2
153660	Upper Leading Edge	HQ Split Nock ø6 mm	2
153422	Spinetip	Spinetip T-Joint ø6 mm	1
153495	Leading Edge	C-Clip 6 mm	7

PRODUCT INTRODUCTION — PRODUCT CLEARING

Januar 2010