


**BRIDLE**

**SESSION\_1.1**

116710

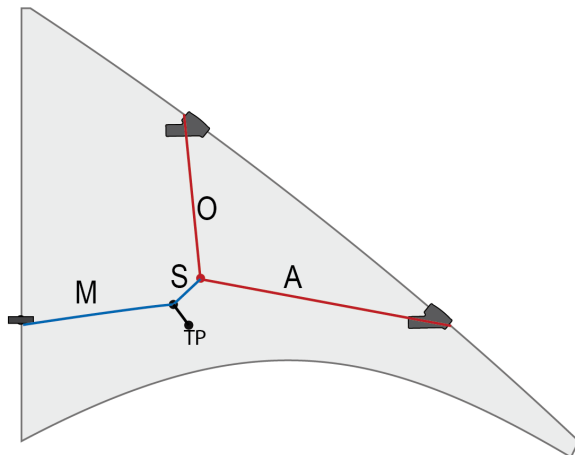

O = 47 cm ; M = 43 cm ; A = 52,5 cm ; S = 10,5 cm

**MATERIAL**  
65 kp corded Dyneema

**INFOS**

<b>KATEGORIE</b>	<b>WINDBEREICH</b>	<b>OPT. WIND</b>
<input checked="" type="checkbox"/> Beginne	5 - 34 KM/H	15 KM/H
<input type="checkbox"/> Advance	3 - 21 MPH	9 MPH
<input type="checkbox"/> Master	1 - 5 BFT.	3 BFT.
<input checked="" type="checkbox"/> Allroun	3 - 18 KNOT.	8 KNOT.
<input checked="" type="checkbox"/> Trick		
<input type="checkbox"/> Traction		
<input type="checkbox"/> Precision		
<input type="checkbox"/> Freestyl		
<input type="checkbox"/> Tea		
<input type="checkbox"/> Low		
	<b>SCHNUR</b>	
	25 - 70 kp	20 - 35 m
	50 - 150lbs	65 - 115 ft

**FRAME**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
a50125	leading Edge	5 mm carbontube avia .1960	2	125
a50082	Spine	5 mm carbontube avia .1960	1	82,5
a50062	upp. spreader	5 mm carbontube avia .1960	2	62,5
a50062	low. spreader	5 mm carbontube avia .1960	1	42,5
130105	outer standoff	2 mm fiberglasrod wrapped	2	22
130105	inner standoff	2 mm fiberglasrod wrapped	2	23

**ABMESSUNGE**

	cm	inch	<b>SPEED</b>
186	73,2	0 100	
	88	34.6	<b>POWER</b>
225	7,9	0 100	

**HINTS & TIPPS**

Easy to fly, multipurpose, very stabel and precise, it is still able to do the hottest tricks. Suitable for beginners and advanced fliers as well.

**SAIL**

Nylon Toray 42g

**INCLUDED**

**PARTS**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153405	Upper Leading Edge	HQ connector 5 mm	2
153405	Lower Leading Edge	HQ connector 5 mm	2
153650	Wingtip	HQ nock 5 mm	2
160050	Center T	center tee Exel 5mm	1
150660	Spinetip	Vinil tube 6/3 25 mm long	1
153415	Standoff/Spreader	HQ Stand off Connector 3,5-5,5mm	4
153412	Standoff/Sail	HQ Stand off Clip 2mm	2
135912	Leading Edge Ferulle	avia alu ferulle .196	2
135912			

**PRODUCT INTRODUCTION** — **PRODUCT CLEARING**

Februar 1998