


BRIDLE

JAM SESSION

116725

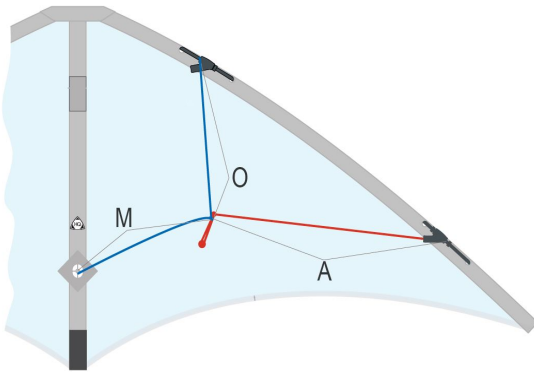

O = 56 cm ; M = 64 cm ; A = 64 / 59 / 54.5 cm

MATERIAL
96 kp corded Dyneema

INFOS

KATEGORIE

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WINDBEREICH


WINDBEREICH	OPT. WIND
5 - 38 KM/H	15 KM/H
3 - 24 MPH	9 MPH
1 - 5 BFT.	3 BFT.
3 - 21 KNOT.	8 KNOT.

SCHNUR

25 - 75 kp	15 - 35 m
50 - 160 lbs	45 - 115 ft

ABMESSUNGE

cm	inch
220	86,6
106	41,7
g	oz
325	11,5



HINTS & TIPPS

High performance kite suitable for beginners.
Flies very steadily and precisely, excellent stunt qualities.

SAIL

Ripstop Nylon.

INCLUDED

PRODUCT INTRODUCTION — PRODUCT CLEARING

Februar 1998

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
A60150	leading Edge	6 mm carbontube Avia .2300	2	150
A60100	Spine	6 mm carbontube Avia .2300	1	100
A60075	low. spreader	6 mm carbontube Avia .2300	2	75
A60055	upp. spreader	6 mm carbontube Avia .2300	1	50
130105	outer standoff	2 mm fiberglasrod wrapped	2	21,5
130105	mid. standoff	2 mm fiberglasrod wrapped	2	23,5
130105	inner standoff	2 mm fiberglasrod wrapped	2	21,5

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153407	Upper Leading Edge	HQ Connector 5,9 mm	2
153407	Lower Leading Edge	HQ Connector 5,9 mm	2
153660	Wingtip	HQ nock 6 mm	2
160460	Center T	cross joint 6 mm	1
153416	Spinetip	standoff connector 5,5 - 6,3 mm	1
153416	Standoff/Spreader	standoff connector 5,5 - 6,3 mm	6
153412	Standoff/Sail	standoff clip/tipp 2 mm	6
153490	Spine/Upper Spreader	rubber ring 10/4 mm	1
135914	Leading Edge Ferulle	alu ferulle Avia .2300	2