


28.01.2025 15:12:02

BRIDLE

TRIXX R2F

116739

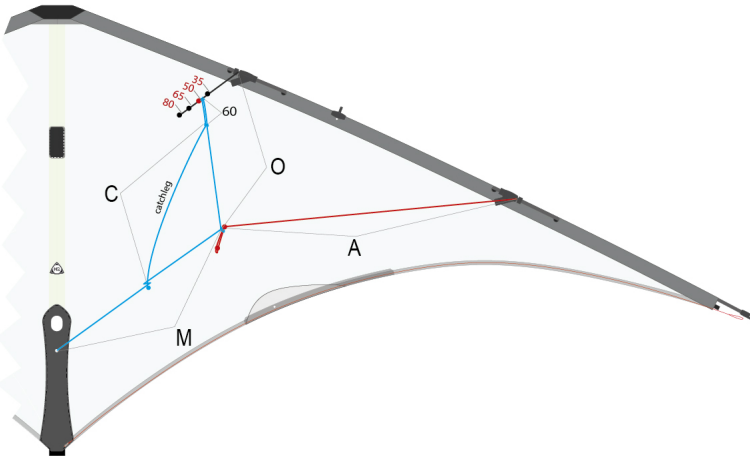

O = 530 mm ; M = 600 mm ; A = 500 mm ; C = 310 mm

MATERIAL
100 daN corded Dyneema prestretched

INFOS

CATEGORY

- Beginner
- Advanced
- Master
- Allround
- Trick
- Traction
- Precision
- Freestyle
- Team
- Low Wind
- Speed

WIND RANGE

6 - 38 KM/H	20 KM/H
4 - 24 MPH	12 MPH
2 - 5 BFT.	4 BFT.
3 - 21 KNOT.	11 KNOT.

FLYING LINE

40 - 70 kp	20 - 30 m
80 - 150 lbs	65 - 95 ft

DIMENSIONS

cm	inch
195	76,8
80	31,5
g	oz
293	10,3

SPEED

0 100

POWER

0 100

HINTS & TIPS

SAIL MATERIAL

Ripstop-Polyester "light" 31g

INCLUDED ACCESSORIES

- Winderset with straps
- Dyneema (Liros) flying lines : 2 x 25 m | 50 kp
- Sturdy quiver
- Sportkite guide
- Productinformation sheet

PRODUCT INTRODUCTION — **PRODUCT CLEARING**

2025

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
K06082	Spine	carbon tube 6x4 mm 82,5 cm	1	760
K06082	Upper LE	carbon tube 6x4 mm 82,5 cm	2	625
K06082	Lower LE	carbon tube 6x4 mm 82,5 cm	2	625
K05082	Upper Spreader	carbon tube 5x3 mm 82,5 cm	1	520
K06082	Lower Spreader	carbon tube 6x4 mm 82,5 cm	2	635
K03120	Standoff	solid carbon 3 mm	2	240
F04120	Plug lower spreader	solid fiberglass 4 mm	2	100
F04120	Plug leading edge	solid fiberglass 4 mm	2	80

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144550	Spine Nose	HQ Endcap, moulded, ø5,5 mm	1
160060	Spine	Center-T NP ø6 mm	1
185284	Spinetip	Trim-weight 15g	1
153425	Upper LE	HQ LE-Connector ø5 mm angled	2
153426	Lower LE	HQ LE-Connector ø6 mm angled	2
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	2
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	2
144550	Upper LE	HQ Endcap, moulded, ø5,5 mm	2
153660	Lower LE	HQ Split Nock ø6 mm	2
144300	Standoff	HQ Endcap, moulded, ø3 mm	2