




28.01.2025 14:40:53

BRIDLE

BREEZO RAINBOW R2F

116775

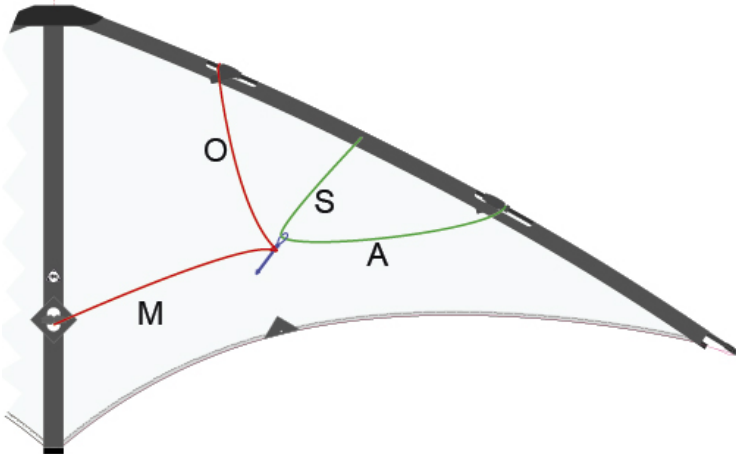

O = 530 mm ; M = 495 mm ; AS = 1000 mm

MATERIAL
40kp Polyester



INFOS

CATEGORY

- ☒ Beginner
- ☒ Advanced
- ☒ Master
- ☒ Allround
- ☐ Trick
- ☐ Traction
- ☐ Precision
- ☐ Freestyle
- ☐ Team
- ☐ Low Wind
- ☐ Speed

WIND RANGE

10 - 49 KM/H
6 - 30 MPH
2 - 6 B.F.T.
5 - 26 KNOT.

OPT. WIND

24 KM/H
15 MPH
4 B.F.T.
13 KNOT.

FLYING LINE

40 - 70 kp 25 - 35 m
80 - 150 lbs 80 - 115 ft

DIMENSIONS

	cm	inch
	170	66,9
	82	32,3
	245 g	8,6 oz

SPEED



POWER



HINTS & TIPS

SAIL MATERIAL

70D Rip-Stop-Polyester

INCLUDED ACCESSORIES

Winderset wit straps
Dyneema (Liros) flying lines : 2 x 25 m | 50 kp
Quiver made from fully printed satin fabric
Sportkite Guide
Productinformation sheet

PRODUCT INTRODUCTION

PRODUCT CLEARING

2025

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
H05082	Spine	Hybrid-Tube 5 x 3 mm / 82.5 cm	1	660
G05120	Upper LE	Fiberglass-Tube 5 / 120 cm	2	575
G05120	Lower LE	Fiberglass-Tube 5 / 120 cm	2	575
G05120	Upper Spreader	Fiberglass-Tube 5 / 120 cm	1	450
H05082	Lower Spreader	Hybrid-Tube 5 x 3 mm / 82.5 cm	2	565
	Standoff	Fiberglass 2.5 mm	2	230
F28120	Plug lower spreader	Fiberglass 2.5 mm	2	80
F28120	Plug leading edge	Fiberglass 2.5 mm	4	50

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144500	Spine Nose	HQ Endcap, moulded, ø5 mm	1
160050	Spine	NP Center-T ø5 mm	1
	Lower spine end	T-Connector 5 mm	1
153425	Leadingedge	HQ LE-Connector ø5 mm angled	4
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	2
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153493	Leadingedge/Spine	C-Clip 5 mm	7
135905	Leadingedge Ferrule	Aluminium Ferrule 5 mm	2
153650	Lower LE	HQ Split Nock ø5 mm	2