


15.04.2021 15:35:04

## BRIDLE

## YUKON RAINBOW 2004

116775

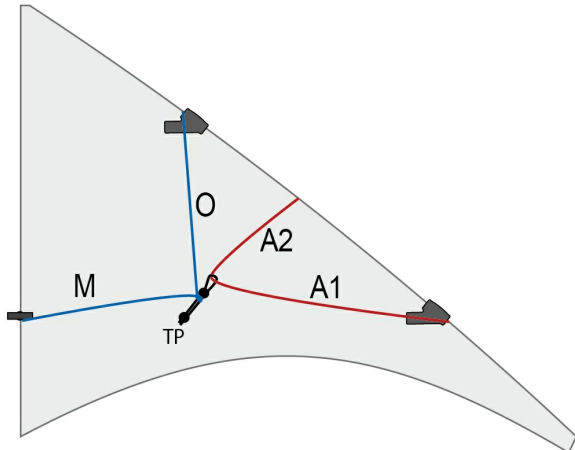

O = 45 cm ; M = 45 cm ; A = 76 cm (Sliding Leg)  
(A1 = 41 cm ; A2 = 35 cm)

**MATERIAL**  
prestretched Polyester 55kp

Best Seller Allround

### INFOS

#### CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

#### WIND RANGE

6 - 38	KM/H	20	KM/H
4 - 24	MPH	12	MPH
2 - 5	BFT.	4	BFT.
3 - 21	KNOT.	11	KNOT.


#### OPT. WIND

#### FLYING LINE

30 - 60	kp	20 - 30	m
60 - 130	lbs	65 - 95	ft

#### DIMENSIONS

	cm	inch
	164	64,6
	84	33,1
	g	oz



#### HINTS & TIPPS

#### SAIL MATERIAL

Ripstop-Nylon

#### INCLUDED

HQ Sportkite Quiver  
Flyinglines: Blendline 45 kp, 2 x 20 m,  
on winder;  
Flyingstraps  
Instructions

#### PRODUCT INTRODUCTION — PRODUCT CLEARING

Februar 2004

### FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø4 mm Solid Hybrid Rod	1	455
	Lower Spreader	ø5 mm Carbon Spar	1	1100
	Spine	ø4 mm Solid Hybrid Rod	1	650
	Leadingedge	ø4 mm Solid Hybrid Rod	2	1160
	Standoff	ø2 mm Solid Fiberglas Rod	2	250

### PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144200	Standoff	HQ Endcap, moulded, ø2 mm	2
144400	Leadingedge/Spine	HQ Endcap, moulded, ø4 mm	3
153640	Lower LE	HQ Split Nock ø4 mm	2
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153490	Spine	Rubber Ring ø10/4 mm	1
153612	Lower Spreader	HQ Spreader Connector "Bone" ø5 mm	1
153415	Lower Spreader	HQ Stand Off Verbinder (3,5-5,5 mm)	2
153424	Leadingedge	HQ LE-Connector ø4 mm angled	4
153492	Leadingedge	C-Clip 4 mm	6
153460	Spine/Upper Spreader	Rubber Ring ø6/4 mm	1
153420	Spinetip	Spinetip T-Joint ø4 mm	1