


15.04.2021 16:13:26

BRIDLE

MAESTRO_II

116782

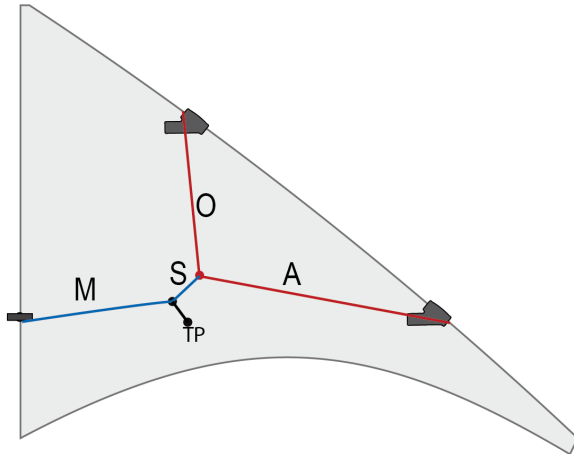

O = 45 cm ; M = 52 cm ; A = 50 cm ; S = 9 cm


MATERIAL
45kp corded Polyester

Best Seller Allround

INFOS

KATEGORIE	WINDBEREICH	OPT. WIND
<input type="checkbox"/> Beginner	<input type="checkbox"/> 10 - 40 KM/H	20 KM/H
<input checked="" type="checkbox"/> Advanced	6 - 25 MPH	12 MPH
<input checked="" type="checkbox"/> Master	2 - 6 BFT.	4 BFT.
<input checked="" type="checkbox"/> Allround	5 - 22 KNOT.	11 KNOT.
<input checked="" type="checkbox"/> Trick		
<input type="checkbox"/> Traction		
<input checked="" type="checkbox"/> Precision		
<input checked="" type="checkbox"/> Freestyle		
<input type="checkbox"/> Team		
	SCHNUR	
	50 - 80 kp	20 - 30 m
	110 - 170 lbs	65 - 95 ft

ABMESSUNGE		
cm	inch	
228	89,8	
100	39.4	
g	oz	



HINTS & TIPPS

SAIL

Ripstop Nylon

INCLUDED

HQ Sportkites Quiver
Flyinglines: Dyneema 70kp, 2x 25m on winder
Flyingstraps

PRODUCT INTRODUCTION — PRODUCT CLEARING

Januar 2010

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	ø6 mm Carbon Spar	1	880
	Upper LE	ø6 mm Carbon Spar	2	720
	Lower LE	ø6 mm Carbon Spar	2	720
	Upper Spreader	ø6 mm Carbon Spar	1	470
	Lower Spreader	Dynamic T 15 *1)	2	720
	Inner Standoff	ø3 mm Soild Carbon Rod	2	260
	Outer Standoff	ø3 mm Soild Carbon Rod	2	260

*1) tapered wrapped carbon spar

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153660		HQ Split Nock ø6 mm	2
850063		Center-T Dynamics	1
153426		HQ LE-Connector ø6 mm angled	4
153419		Stand Off Clip, screwed ø3 mm	4
153416		HQ Stand Off Connector big (5,5-6,3mm)	4
		Aluminium Ferrule ø6 mm	2
153606		Jojo Stopper ø6 mm	2
		Weight 15 gramm	1
		Weight 15 gramm drilled trough	1
144300		HQ Endcap, moulded, ø3 mm	4
144550		HQ Endcap, moulded, ø5,5 mm	3
153495		C-Clip 6 mm	7
850062		Inner Ferrul f. Dynamic Spars (ø6.2 mm)	1