


BRIDLE

M-BAT

116800

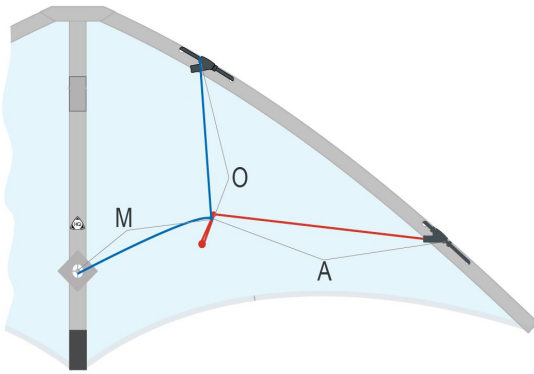

O = 50 cm ; M = 51 cm ; A = 57 cm

MATERIAL
90 kp sleeved Dyneema

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

6 - 45 KM/H	25 KM/H
4 - 28 MPH	16 MPH
2 - 6 BFT.	4 BFT.
3 - 24 KNOT.	13 KNOT.


OPT. WIND

FLYING LINE

45 - 100 kp	25 - 35 m
90 - 210 lbs	80 - 115 ft

DIMENSIONS

	cm	inch
	190	74,8
	85	33,5
	g	oz
	266	9,4



HINTS & TIPPS

SAIL MATERIAL

Polyester Spinnaker VENTEX strong

INCLUDED

PRODUCT INTRODUCTION — **PRODUCT CLEARING**

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
a60125	leading Edge	6 mm carbontube Avia .2300	2	125
a60082	lower spreader	6 mm carbontube Avia .2300	2	67,5
a60050	upper spreader	6 mm carbontube Avia .2300	1	42,5
a60075	Spine	6 mm carbontube Avia .2300	1	70
130350	inner standoff	3 mm fiberglasrod	2	16
130105	outer standoff	2 mm fiberglasrod	2	21
130350	batten	3 mm fiberglasrod	2	18

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153407	Upper Leading Edge	HQ connector 5,9 mm	2
153407	Lower Leading Edge	HQ connector 5,9 mm	2
153660	Wingtip	HQnock 6 mm	2
160060	Center T	center tee 6 mm Exel	1
144600	Spinetip	endcap 6 mm	1
153416	Standoff/Spreader	HQ standoff connector 5.5 - 6.3 mm	4
153415	Standoff/Sail	HQ standoff connector 3.5 - 5.5 mm	2