


**BRIDLE**

**JIVE\_II\_INFRARED**

11685515

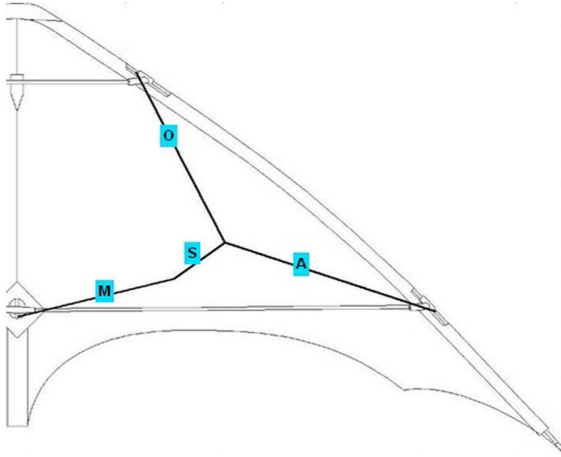

O = 46 cm ; M = 48,5cm ; A = 50 cm ; S = 3 cm

**MATERIAL**  
45kp Sleeved Polyester

Best Seller Allround

**INFOS**

**CATEGORY**

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

**WIND RANGE**

6 - 38	KM/H	20	KM/H
4 - 24	MPH	12	MPH
2 - 5	BFT.	4	BFT.
3 - 21	KNOT.	11	KNOT.

**OPT. WIND**

**FLYING LINE**

40 - 70	kp	20 - 25	m
80 - 150	lbs	65 - 80	ft

**DIMENSIONS**

	cm	inch
	197	77,6
	87	34,3
	g	oz
	260	9,2

**SPEED**



**POWER**



**FRAME**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	ø6 mm Carbon Spar	1	825
	Upper LE	ø5 mm Carbon Spar	2	650
	Lower LE	ø6 mm Carbon Spar	2	650
	Upper Spreader	ø5 mm Carbon Spar	1	440
	Lower Spreader	ø6 mm Carbon Spar	2	650
	Standoff	ø3 mm Solid Fiberglas Rod	2	250
	Plug lower Spreader	ø4 mm Solid Fiberglas Rod	2	80

**HINTS & TIPPS**

**SAIL MATERIAL**

Ripstop Nylon/ ab 2015 70D Polyestertuch

**INCLUDED**

HQ Sportkites Köcher  
Flying Lines: Dyneema 60kp, 2x 25m on winder  
Flying Straps

**PARTS**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153650	Lower LE	HQ Split Nock ø5 mm	2
160060	Spine/Lower Spreader	Center-T Exel ø6 mm	1
153425	Leadingedge	HQ LE-Connector ø5 mm angled	4
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	2
153416	Lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	2
144550	Leadingedge/Spine	HQ Endcap, moulded, ø5,5 mm	3
	Spinetip	Spinetip end fitting tube	1
144300	Standoff	HQ Endcap, moulded, ø3 mm	2
153493	Leadingedge/Spine	C-Clip 5 mm	6
153495	Spine	C-Clip 6 mm	1
135912	Leadingedge	Avia Alu Ferrule ø`0.196 / ø5 mm	2
	Spinetip	Spinetip Tuning Weight (alternativ for the tube fitting)	1

**PRODUCT INTRODUCTION** — **PRODUCT CLEARING**

Januar 2010