


20.04.2021 14:12:29

**BRIDLE**

**TRAMONTANA\_RETRO\_L**

117305

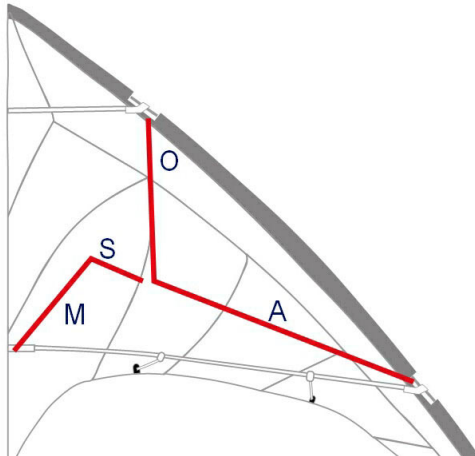

O = 46 cm ; M = 81,5 cm ; A = 63 cm ; S = 29 cm

**MATERIAL**  
Sleeved Dyneema 96kp

Retro Line

**INFOS**

**CATEGORY**

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

**WIND RANGE**

6 - 38 KM/H	20 KM/H
4 - 24 MPH	12 MPH
2 - 5 BFT.	4 BFT.
3 - 21 KNOT.	11 KNOT.

**OPT. WIND**

**FLYING LINE**

45 - 70 kp	25 - 40 m
90 - 150 lbs	80 - 130 ft

**DIMENSIONS**

	cm	inch
	236	92,9
	120	47.2
	g	oz
	368	13



**HINTS & TIPPS**

**SAIL MATERIAL**

Icarex PC31

**INCLUDED**

HQ Sportkite Quiver "Retro Line"  
HQ Pin; HQ Sticker,  
Instructions

**PRODUCT INTRODUCTION** — **PRODUCT CLEARING**

Januar 2010

**FRAME**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø6 mm Carbon Spar (Avia .2300)	1	650
	Lower Spreader	ø6 mm Carbon Spar (Avia .2300) + Plug	2	825
	Spine	ø6 mm Carbon Spar (Avia .2300)	1	1170
	Lower LE	ø6 mm Carbon Spar (Avia .2300)	2	825
	Lower LE	ø6 mm Carbon Spar (Avia .2300)	2	825
	Inner Standoff	ø3 mm Solid Fiberglas Rod	2	205
	Outer Standoff	ø3 mm Solid Fiberglas Rod	2	222
	Sailbatten	ø3 mm Solid Fiberglas Rod	2	190
	Plug lower Spreader	ø4 mm Solid Fiberglas Rod	2	100

**PARTS**

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144200	Standoff/Sailbatten	HQ Endcap, moulded, ø2 mm	6
144550	Leadingedge/Spine	HQ Endcap, moulded, ø5,5 mm	3
153660	Leadingedge/Spine	HQ Split Nock ø6 mm	3
153490	Spine/upper Spreader	Rubber Ring ø10/4 mm	1
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	4
153416	LE / lower Spreader	HQ Stand Off Connector big (5,5-6,3mm)	6
135914	Leadingedge	Avia Alu Ferrule ø 230 / ø5.9 mm	2
160060	Spine	Center-T Exel ø6 mm	1
153426	Leadingedge	HQ LE-Connector ø6 mm angled	4
	Sailbatten	T-Connector ø3 mm	2