


BRIDLE

TRAMONTANA_2000_CHP

117320

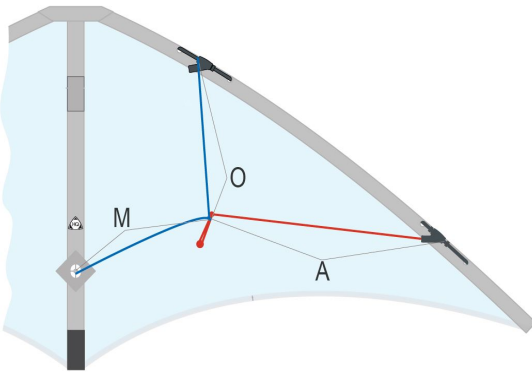

Standard bridle: O = 69 M = 76 A = 84,5
 Turbo bridle: O = 50 M = 65,5 A = 58,5 S = 10,5

MATERIAL
 Corded Dyneema 96 kp

INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

5 - 32 KM/H
 3 - 20 MPH
 1 - 5 BFT.
 3 - 17 KNOT.

OPT. WIND

15 KM/H
 9 MPH
 3 BFT.
 8 KNOT.

FLYING LINE

25 - 90 kp 20 - 40 m
 50 - 190lbs 65 - 130 ft

DIMENSIONS

cm inch
 238 93,7
 121 47,6
 g oz
 286 10,1



HINTS & TIPPS

The Tramontana 2000 Comp'HP is the competition dream. A full size team kite capable of razor sharp precision and the flattest 540's around. Built around the G-Force UL spars, this is a kite that can take the knocks. If you want a ready to compete kite, check out the Tramontana Comp'HP

SAIL MATERIAL

Spinnaker Polyester VENTEX

INCLUDED

PRODUCT INTRODUCTION — PRODUCT CLEARING

Februar 1998

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
135980	upper LE	G - Force UL 82.5cm	2	82,5
135980	lower LE	G - Force UL 82.5cm	2	82,5
a60125	Spine	5,9 mm carbontube Avia .2300	1	106
135980	low. spreader	G - Force UL 82.5cm	2	82,5
a60065	upp. spreader	5,9 mm carbontube Avia .2300	1	65
130105	outer standoff	2,1 mm fiberglasrod	2	21,5
130105	inner standoff	2,1 mm fiberglasrod	2	23
a20071	batten	Microcarbon AVIA .080	2	16,3

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
135973	Upper Leading Edge	G - Force APA Conector "Ca"	2
135974	Lower Leading Edge	G - Force APA Conector "Db"	2
153660	Wingtip	HQ nock 6mm	2
153360	Center T	Center tee Tramontana	1
153660	Spinetip	HQ nock 6mm	1
153416	Standoff/Spreader	HQ standoff connector 5.5 - 6.3 mm	4
153412	Standoff/Sail	HQ standoff clip 2mm	2
153412	Standoff/Sail	HQ standoff clip 2mm	2
153416	Leading Edge/sail (batten)	HQ standoff connector 5.5 - 6.3 mm	2
135981	Leading Edge Ferulle	G - Force ferulle tube 8 cm CFL, .285	2
135982	Lower spreader	G - Force ferulle solid 10 cm CFLS, .285	2
153490	Spine/Upper Spreader	rubber ring 10/4 mm	1