


13.11.2019 11:54:11

## BRIDLE

Infinity

117366

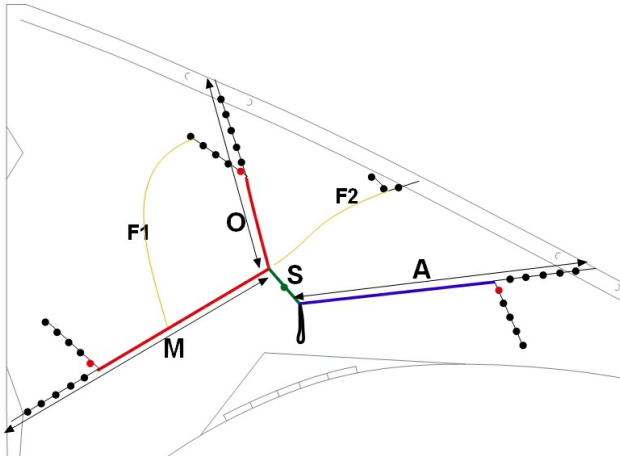

O = 54 cm ; M = 62 cm ; A = 53 cm ; S = 5 cm ; F1 = 47 cm ; F2 = 50 cm

Material:

**MATERIAL**

Sleeved Dyneema 96kp

Trick & Competition

### INFOS

**KATEGORIE**

- Beginner
- Advanced
- Master
- Allround
- Trick
- Traction
- Precision
- Freestyle
- Team
- Low Wind

**WINDBEREICH**

8 - 28	KM/H	15	KM/H
5 - 17	MPH	9	MPH
2 - 4	BFT.	3	BFT.
4 - 15	KNOT.	8	KNOT.

**OPT. WIND**

**SCHNUR**

45 - 70	kp	25 - 40	m
90 - 150	lbs	80 - 130	ft

**ABMESSUNGEN**

	246	cm	96,9	inch
	96	cm	37,8	inch
	362	g	12,8	oz

**SPEED**



**POWER**



**HINTS & TIPPS**

**SAIL MATERIAL**

ICAREX PC31 Ripstop Polyester

**INCLUDED ACCESSORIES**

HQ Sportkites Quiver Instructions

**PRODUCT INTRODUCTION**

**PRODUCT CLEARING**

Januar 2009

### FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
850067	Upper Spreader	Dynamic D15(cylindric spar; Plugs on both ends)	1	520
	Lower Spreader	Dynamic DT15, 82.5cm (Plugs on thin end)	2	755
	Spine	Dynamic D15 (cylindric spar)	1	900
850067	Upper LE	Dynamic DT15, 82.5cm	2	825
	Lower LE	Dynamic DT15, 82.5cm	2	695
850067	Inner Standoff	ø3 mm Solid Carbon Rod	2	260
	Outer Standoff	ø3 mm Solid Carbon Rod	2	250
850062	1) Innenmuffe	Inner Ferrul f. Dynamic Spars (ø6.2 mm) Solid		
	2) Innenmuffe	Inner Ferrul f. Dynamic Spars (ø6.2 mm) Tube		

### PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144300	Standoff	HQ Endcap, moulded, ø3 mm	4
144700	Spine Nose	Endcap ø7 mm	1
144800	Leadingedge Nose	Endcap ø7 mm	2
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	4
153416	Trailingedge	HQ Stand Off Connector big (5,5-6,3mm)	4
153660	Lower LE	HQ Split Nock ø6 mm	2
153608	Leadingedge	Yoyo Stopper ø7.8 mm (Skyshark + Dynamics)	2
153426	Leadingedge/Spine	HQ LE-Connector ø6 mm angled *1)	6
850063	Spinetip	Tuning Weight 16g	1
	Spinetip	Spinetip end fitting	1
850063	Spine	Center-T Dynamics	1
153498	Leadingedge	C-Clip 8 mm	10

\*1) the upper LE-connector has to be drilled with a 7 mm drill for the upper spreader