


29.09.2021 11:44:44

## BRIDLE

## WHIZZ

117482

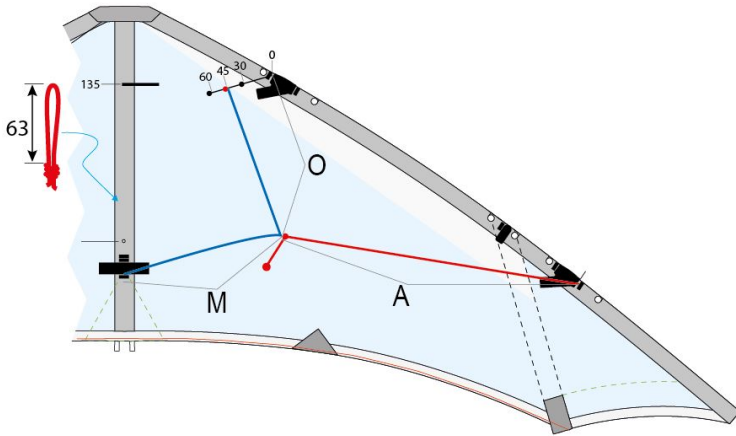

O = 57cm | M = 57 cm | A = 54 cm || knottedder measured from the frame 30, 45, 60 mm

**MATERIAL**  
100 kp corded Dyneema

### INFOS

#### CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

#### WIND RANGE

12 - 49 KM/H  
7 - 30 MPH  
3 - 6 BFT.  
6 - 26 KNOT.

#### OPT. WIND


30 KM/H  
19 MPH  
5 BFT.  
16 KNOT.

#### FLYING LINE

50 - 120 kp  
110 - 260 lbs  
30 - 35 m  
95 - 115 ft

#### DIMENSIONS

cm inch  
190 74,8  
70 27.6  
g oz



#### HINTS & TIPPS

#### SAIL MATERIAL

70D Polyetser ; Mylar

#### INCLUDED

Sportkite Guide  
Productinformation

#### PRODUCT INTRODUCTION — PRODUCT CLEARING

Januar 2015

### FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	Ø6 mm carbon tube	1	435
	Lower Spreader	Ø8 mm carbon tube	2	640
	Spine	Ø6 mm carbon tube	1	565
	Leadingedge	Ø6 mm carbon tube	2	1140
	Standoff	Ø2.5 mm solid fiberglas	2	145
G04125	Sailbatten	Ø4 mm fiberglas tube / black	2	320
	Spine batten	Ø2.5 mm solid fiberglas	1	510

### PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
	Center-T	Center-T Ø8/6 mm	1
153426	Upper LE	HQ LE-Connector ø6 mm angled	2
153428	Lower LE	Connector Ø8 mm	2
	Spine	HQ LE-Connector ø4 mm angled	1
153416	Leadingedge/ lower	HQ Stand Off Connector big (5,5-6,3mm)	4
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153660	Leadingedge/Spine	HQ Split Nock ø6 mm	3
153495	Leadingedge	C-Clip 6 mm	12
	Sailbatten	Endcap Ø3 mm, soft	4
	Spine batten	Endcap 2.5 mm hard	2
	Standoff/Spreader	Endcap 2.5 mm	2

\* 1) plus reducer to 6 mm diameter from a piece of 8 mm carbon fiber