


BRIDLE

Fazer XL

117486

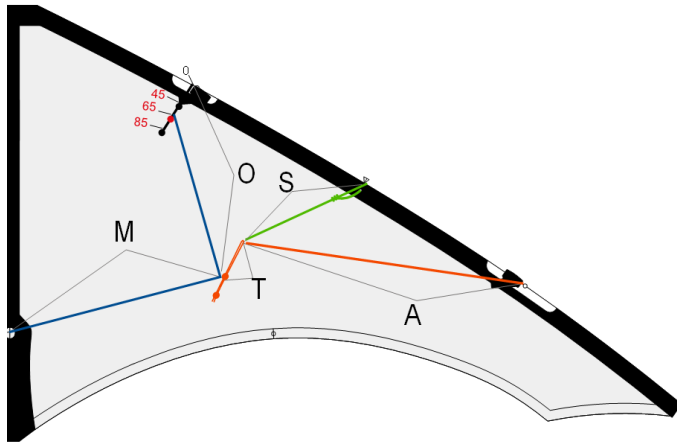

O = 47cm ; M = 48,5cm ; A = 47cm

MATERIAL
200kp Sleeved Dyneema

Speed & Power

INFOS

KATEGORIE

- Beginner
- Advanced
- Master
- Allround
- Trick
- Traction
- Precision
- Freestyle
- Team
- Low Wind

WINDBEREICH

8 - 61	KM/H	30	KM/H
5 - 38	MPH	19	MPH
2 - 7	BFT.	5	BFT.
4 - 33	KNOT.	16	KNOT.

OPT. WIND

SCHNUR

140 - 200	kp	30 - 40	m
300 - 430	lbs	95 - 130	ft

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø8 mm Carbon Spar	1	700
	Lower Spreader	ø10mm Carbon Spar + Plug *1)	2	1000
	Spine	ø8 mm Carbon Spar	1	865
	Upper LE	ø8 mm Carbon Spar	2	825
	Lower LE	ø8 mm Carbon Spar	2	825
	Standoff	ø3 mm Solid Fiberglas Rod	2	205
	Sailbatten	ø4 mm Solid Fiberglas Rod	2	265
	1) Plug low Spr.	ø8 mm Solid Fiberglas Rod	2	200
	2) Plug LE	6mm Solid Fiberglas Rod	4	80

ABMESSUNGEN

	280	cm	110,2	inch
	95	cm	37,4	inch
	615	g	21,7	oz

SPEED

0 ————— 100

POWER

0 ————— 100

HINTS & TIPPS

SAIL MATERIAL

Ripstop Polyester

INCLUDED ACCESSORIES

HQ Sportkites Quiver Instructions

PRODUCT INTRODUCTION

PRODUCT CLEARING

Januar 2012

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144800	Leadingedge/Spine	Endcap ø8 mm	4
144400	Sailbatten	HQ Endcap, moulded, ø4 mm	4
144300	Standoff	HQ Endcap, moulded, ø3 mm	2
	Upper LE	Leading Edge Connector ø8/8 mm	2
	Lower LE	Leading Edge Connector ø8/10 mm *1)	2
125520	Center-T	Wings K LE-Connector ø8/10mm	2
	Upper LE	Split Nock ø8 mm	2
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	2
153498	Leadingedge/Spine	C-Clip 8 mm	14
	Leadingedge Ferrule	Ferrule 8 mm	2
	Standoff/Spreader	Standoff Connector big (10mm)	4

*1) the lower leadingedge connetor is inserted with a 10mm carbon spar on the leading edge