


15.04.2021 16:07:56

BRIDLE

FAZER XXL

117487

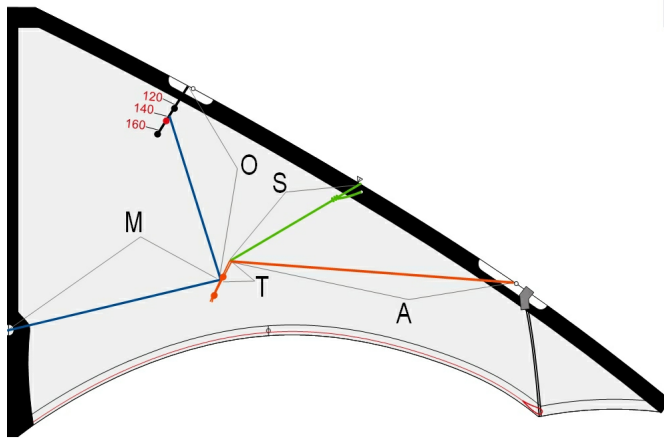

O = 112,5 cm ; M = 127 cm ; A = 120 cm ; S = 109 cm ; T = 4 cm

MATERIAL
300kp Sleeved Dyneema

Speed & Power

INFOS

KATEGORIE

Beginner
 Advanced
 Master
 Allround
 Trick
 Traction
 Precision
 Freestyle
 Team

WINDBEREICH | **OPT. WIND**

6 - 49 KM/H	30 KM/H
4 - 30 MPH	19 MPH
2 - 6 BFT.	5 BFT.
3 - 26 KNOT.	16 KNOT.

SCHNUR

180 - 250 kp	25 - 40 m
390 - 540 lbs	80 - 130 ft

ABMESSUNG

cm	inch
360	141,7
130	51,2
g	oz
1220	43

SPEED 0 to 100 scale

POWER 0 to 100 scale

HINTS & TIPPS

SAIL
Ripstop-Polyester

INCLUDED
HQ Sportkites Quiver
Instructions

PRODUCT INTRODUCTION — **PRODUCT CLEARING**
Januar 2012

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø10 mm Carbon Spar	1	945
	Lower Spreader	ø12 mm Carbon Spar + Plug *1)	2	1330
	Spine	ø10 mm Carbon Spar	1	1150
	Upper LE	ø10 mm Carbon Spar + Plug *2)	2	1100
	Lower LE	ø10 mm Carbon Spar + Plug *2)	2	1100
	Standoff	ø3 mm Solid Carbon Rod	2	280
	Sailbatten	ø5 mm Hybrid Spar *3)	2	325
	Plug lower Spreader	1) ø10mm Solid Fiberglas Rod	2	250
	Plug Leadingedge	2) ø8mm Solid Fiberglas Rod	4	120

*3) mount 2 stopperclips 25mm below the end of the sailbatten, to prevent a driving of the connectors.

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144500	Sailbatten	HQ Endcap, moulded, ø5 mm	2
	Leadingedge/Spine	Endcap ø10 mm	4
	Lower LE	Split Nock ø10 mm	2
	Upper LE	Leadingedge Connector ø10/10 mm	2
	Lower LE	Leadingedge Connector ø10/12 mm	2
	Lower Spreader	Standoff Connector ø10 mm	2
125525	Center-T	Wings K LE-Connector ø10/12 mm	1
	Leadingedge/Sailbatten	Sailbatten Connector APA "B" *1)	2
153493	Sailbatten	C-Clip ø5 mm	4
	Leadingedge/Spine	C-Clip ø10 mm (Kersch Wings)	15
	Leadingedge Ferrule	Ferrule ø10 mm	2

*1) drilled