


25.11.2019 10:02:45

## BRIDLE

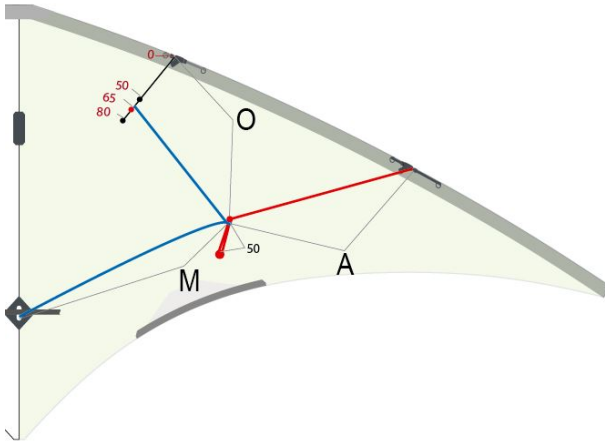


O = 560 mm ; M = 645 mm ; A = 475 mm

**MATERIAL**  
Sleeved Dyneema 60 daN

## SHADE

117609

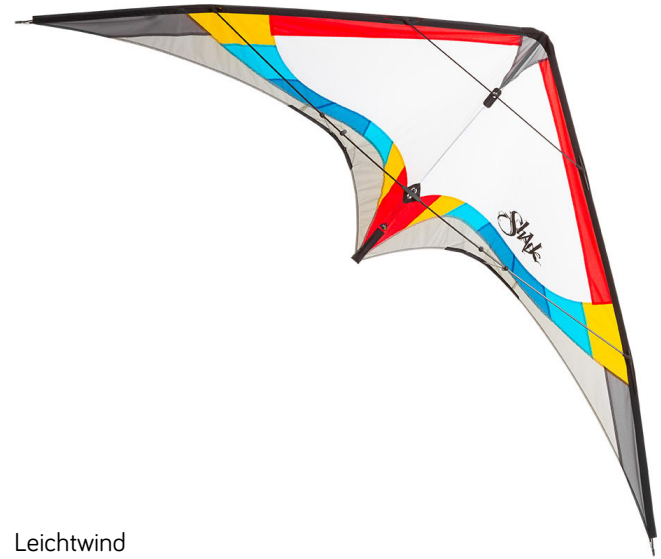

Leichtwind

### INFOS

<b>KATEGORIE</b> <input checked="" type="checkbox"/> Beginner <input checked="" type="checkbox"/> Advanced <input type="checkbox"/> Master <input type="checkbox"/> Allround <input checked="" type="checkbox"/> Trick <input type="checkbox"/> Traction <input type="checkbox"/> Precision <input type="checkbox"/> Freestyle <input type="checkbox"/> Team <input checked="" type="checkbox"/> Low Wind	<b>WINDBEREICH</b>		<b>OPT. WIND</b>	
	4 - 22	KM/H	12	KM/H
	2 - 14	MPH	7	MPH
	1 - 4	BFT.	3	BFT.
	<b>SCHNUR</b>			
25 - 60	kp	15 - 30	m	
50 - 130	lbs	45 - 95	ft	

<b>ABMESSUNGEN</b>		<b>SPEED</b>	
cm	inch	0 100	
215	84,6	[Color scale]	
92	36,2	[Color scale]	
<b>POWER</b>		0 100	
g	oz	[Color scale]	
200	7,1	[Color scale]	

### HINTS & TIPPS

### SAIL MATERIAL

30D Polyester light

### INCLUDED ACCESSORIES

### PRODUCT INTRODUCTION

### PRODUCT CLEARING

Januar 2020

### FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	Ø5 mm carbon tube	1	760
	Upper LE	Ø4 mm carbon tube	2	700
	Lower LE	Ø4 mm carbon tube	2	700
	Plugs Leading Edge	Ø2 mm solid fiberglass on ferrule side	4	50
	Upper Spreader	Ø4 mm carbon tube	1	595
	Lower Spreader	Ø5 mm carbon tube	2	700
	Plugs Low. Spreader	Ø3 mm solid fiberglass at center-T	2	100
	Outer Standoff	Ø3 mm solid carbon	2	250
	Inner Standoff	Ø2.1 mm solid fiberglass wrapped	2	250

### PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
160050	Spine/Lower Spreader	Center-T Exel ø5 mm	1
135910	Leadingedge	Avia Alu Ferrule ø`157 / ø4 mm	2
153424	Upper LE	HQ LE-Connector ø4 mm angled	2
153424	Lower LE	HQ LE-Connector ø4 mm angled	2
153415	Lower Spreader	HQ Stand Off Verbinder (3,5-5,5 mm)	4
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153419	Trailingedge	Stand Off Clip, screwed ø3 mm	2
153640	Lower LE	HQ Split Nock ø4 mm	2
153492		C-Clip 4 mm	6
153493		C-Clip 5 mm	2
144500		HQ Endcap, moulded, ø5 mm	1
144400		HQ Endcap, moulded, ø4 mm	2
144200	Standoff	HQ Endcap, moulded, ø2 mm	2
144160	Standoff		2