


25.11.2019 10:01:22

## BRIDLE

## FLOW

117610

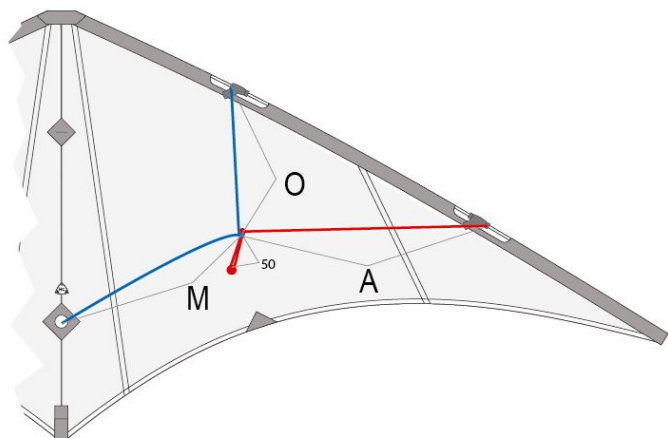

O = 395 mm ; M = 490 mm ; A = 400 mm

**MATERIAL**  
~40 daN sleeved Dyeema

### INFOS

KATEGORIE	WINDBEREICH	OPT. WIND										
	<input type="checkbox"/> Beginner <input checked="" type="checkbox"/> Advanced <input type="checkbox"/> Master <input type="checkbox"/> Allround <input checked="" type="checkbox"/> Trick <input type="checkbox"/> Traction <input type="checkbox"/> Precision <input type="checkbox"/> Freestyle <input type="checkbox"/> Team <input checked="" type="checkbox"/> Low Wind	3 - 18 KM/H   8 KM/H 2 - 11 MPH   5 MPH 1 - 3 BFT.   2 BFT. 2 - 10 KNOT.   4 KNOT.										
ABMESSUNGEN	SCHNUR											
<table border="1"> <tr> <th>cm</th> <th>inch</th> </tr> <tr> <td>157</td> <td>61,8</td> </tr> <tr> <td>76</td> <td>29,9</td> </tr> </table>	cm	inch	157	61,8	76	29,9	<table border="1"> <tr> <th>g</th> <th>oz</th> </tr> <tr> <td>105</td> <td>3,7</td> </tr> </table>		g	oz	105	3,7
cm	inch											
157	61,8											
76	29,9											
g	oz											
105	3,7											
	SPEED 0-100 POWER 0-100											

### FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	Ø3 mm solid carbon	1	646
	Leadingedge	Ø3 mm solid carbon	2	1075
	Upper Spreader	Ø3 mm solid carbon	1	453
	Lower Spreader	Ø3 mm solid carbon	2	1075
	Standoff	Ø2 mm solid carbon	2	190

### HINTS & TIPPS

### SAIL MATERIAL

Polyester light 31g

### INCLUDED ACCESSORIES

### PRODUCT INTRODUCTION — PRODUCT CLEARING

Januar 2020

### PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144300	Leadingedge/Spine	HQ Endcap, moulded, ø3 mm	4
153630	Lower LE	HQ Split Nock ø3 mm	2
153423	Leadingedge	HQ LE-Connector ø3 mm angled	4
	Lower Spreader	Mini Stand-Off Connector	2
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153450	Spine	Rubber Ring ø5/4 mm	1