


BRIDLE

PASSION

117650

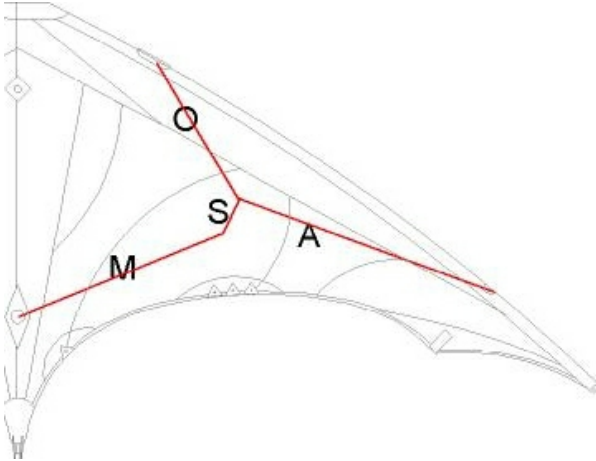

O = 45 cm ; M = 58/54,5/52 cm (verstellbar) ; A = 58,5 cm ; S = 14,5 cm

MATERIAL
96 kp cored Dyneema

INFOS

KATEGORIE

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WINDBEREICH

5 - 32 KM/H
3 - 20 MPH
1 - 5 BFT.
3 - 17 KNOT.

OPT. WIND

15 KM/H
9 MPH
3 BFT.
8 KNOT.

SCHNUR

25 - 75 kp 15 - 40 m
50 - 160lbs 45 - 130 ft

ABMESSUNGE

cm inch
218 85,8
111 43,7
g oz
266 9,4

SPEED



POWER



FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
135980	leading Edge	G-Force UL with ferulle	2	75
135980	leading Edge	G-Force UL	2	75
135980	low. spreader	G-Force UL	2	75
a60082	upp. spreader	6 mm carbontube avia .2300	1	49,5
a60100	Spine	6 mm carbontube avia .2300	1	100
a30100	standoff	3 mm carbonrod avia .125	2	25
a20100	batten	2 mm carbonrod avia .080	2	17,6

HINTS & TIPS

The Passion is a high performance freestyle kite of the highest standards. It straddles precision and tricks in the smoothest way possible. The attention to details is second to none. You can choose between three standoff positions, to make the Passion more tricky or more precise.

SAIL

VENTEX Polyester

INCLUDED

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
135973	Upper Leading Edge	G-Force APA Connector "Ca"	2
135974	Lower Leading Edge	G-Force APA Connector "Db"	2
156363	Wingtip	HQ splitnock 6,3 mm	2
153360	Center T	center tee "Tramontana"	2
153660	Spinetip	HQ splitnock 6,3 mm	1
153416	Standoff/Spreader	standoff connector 5.5 - 6.3 mm	2
153413	Standoff/Sail	standoff clip/tipp 3 mm	2
153490	Spine/Upper Spreader	rubber ring 10/4 mm	1
135981	Leading Edge Ferulle	G-Force ferulle tube 8 cm CFL, .285	2
135982	lower spreader	G-Force ferulle solid 10 cm CFLS, .285	1
153416	Leading Edge/ sail	standoff connector 5.5 - 6.3 mm	2

PRODUCT INTRODUCTION — PRODUCT CLEARING

Februar 1998