


BRIDLE

Quickstep II Graphite

11234660_

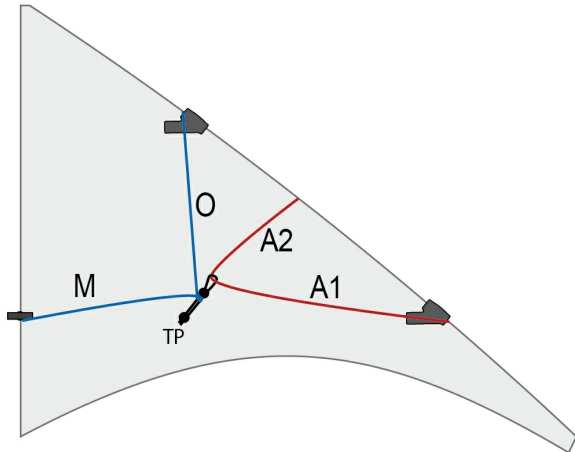

O = 40 cm ; M = 40 cm ; A = 66 cm (Gleitschenkel)
(A1 = 36 cm ; A2 = 30 cm)

MATERIAL
40 kp Polyester

Beginner (Beach & Fun)

INFOS

KATEGORIE

- Beginner
- Advanced
- Master
- Allround
- Trick
- Traction
- Precision
- Freestyle
- Team
- Low Wind

WINDBEREICH | **OPT. WIND**

6 - 38 KM/H	20 KM/H
4 - 24 MPH	12 MPH
2 - 5 BFT.	4 BFT.
3 - 21 KNOT.	11 KNOT.

SCHNUR

30 - 45 kp	20 - 30 m
60 - 90 lbs	65 - 95 ft

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	ø4 mm Fiberglas Spar	1	290
	Lower Spreader	ø4 mm Fiberglas Spar	1	900
	Spine	ø4 mm Fiberglas Spar	1	555
	Leadingedge	ø4 mm Fiberglas Spar	2	870
	Standoff	ø2 mm Solid Fiberglas Rod	2	280

ABMESSUNGEN

	cm	inch	SPEED
135	53,1	0 100	
	cm	inch	POWER
60	23,6	0 100	
	g	oz	

HINTS & TIPPS

Empty box for hints and tips.

SAIL MATERIAL

Ripstop-Polyester

INCLUDED ACCESSORIES

Quiver
Flyinglines: Polyester 2 x 25 m, 40 kp on winder
Flyingstraps / Spools since 2016
Instructions

PRODUCT INTRODUCTION

PRODUCT CLEARING

Februar 2015

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144200	Standoff	HQ Endcap, moulded, ø2 mm	4
144400	Leadingedge/Spine	HQ Endcap, moulded, ø4 mm	4
153640	Lower LE	HQ Split Nock ø4 mm	2
153424	Leadingedge	HQ LE-Connector ø4 mm angled	4
153490	Spine	Rubber Ring ø10/4 mm	1
153610	Lower Spreader	HQ Spreader Connector "Bone" 4 mm	1
153492	Leadingedge	C-Clip 4 mm	6
153414	Lower Spreader	HQ Stand Off Connector small (2,5 - 4 mm)	2