


19.07.2018 09:52:19

## BRIDLE

## Whizz

117482

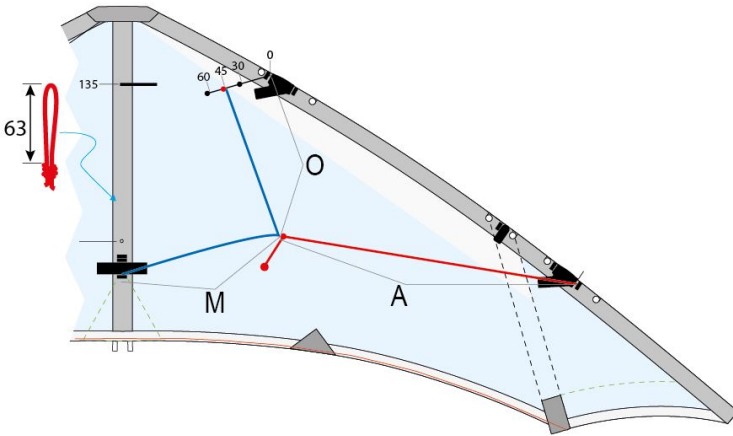

O = 57cm | M = 57 cm | A = 54 cm || knottledder measured from the frame 30, 45, 60 mm

**MATERIAL**  
100 kp corded Dyneema

### INFOS

**KATEGORIE**

- Beginner
- Advanced
- Master
- Allround
- Trick
- Traction
- Precision
- Freestyle
- Team
- Low Wind

**WINDBEREICH**

12 - 49	KM/H	30	KM/H
7 - 30	MPH	19	MPH
3 - 6	BFT.	5	BFT.
6 - 26	KNOT.	16	KNOT.

**OPT. WIND**

**SCHNUR**

50 - 120	kp	30 - 35	m
110 - 260	lbs	95 - 115	ft

**ABMESSUNGEN**

cm	inch
190	74,8
70	27,6

**g**      **oz**

**SPEED**

0 ————— 100

**POWER**

0 ————— 100

**HINTS & TIPPS**

**SAIL MATERIAL**  
70D Polyetser ; Mylar

**INCLUDED ACCESSORIES**  
Sportkite Guide  
Productinformation

**PRODUCT INTRODUCTION**      **PRODUCT CLEARING**  
Januar 2015

### FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Upper Spreader	Ø6 mm carbon tube		435
	Lower Spreader	Ø8 mm carbon tube		640
	Spine	Ø6 mm carbon tube		565
	Leadingedge	Ø6 mm carbon tube		1140
	Standoff	Ø2.5 mm solid fiberglas		145
	Sailbatten	Ø4 mm solid fiberglas		320
	Spine batten	Ø2.5 mm solid fiberglas		510

### PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
	Center-T	Center-T Ø8/6 mm	1
153426	Upper LE	HQ LE-Connector ø6 mm angled	2
153428	Lower LE	Connector Ø8 mm	2
	Spine	HQ LE-Connector ø4 mm angled	1
153416	Leadingedge/ lower spreader	HQ Stand Off Connector big (5,5-6,3mm)	4
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2
153660	Leadingedge/Spine	HQ Split Nock ø6 mm	3
153495	Leadingedge	C-Clip 6 mm	12
	Sailbatten	Endcap Ø3 mm, soft	4
	Spine batten	Endcap 2.5 mm hard	2
	Standoff/Spreader	Endcap 2.5 mm	2

\* 1) plus reducer to 6 mm diameter from a piece of 8 mm carbon fiber