


BRIDLE

Cirrus Emerald

117606

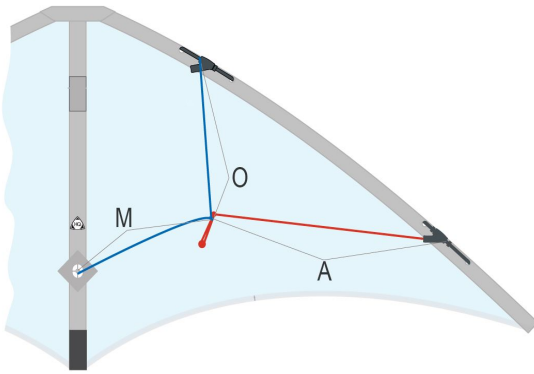

O = 47cm ; M = 48,5cm ; A = 47cm

MATERIAL
Polyester

Low-Wind

INFOS

KATEGORIE	<input checked="" type="checkbox"/> Beginner	4 - 55 KM/H	25 KM/H
	<input checked="" type="checkbox"/> Advanced	2 - 34 MPH	16 MPH
<input type="checkbox"/> Master	1 - 7 B.F.T.	4 B.F.T.	
<input type="checkbox"/> Allround	2 - 30 KNOT.	13 KNOT.	
<input type="checkbox"/> Trick			
<input type="checkbox"/> Traction			
<input type="checkbox"/> Precision			
<input type="checkbox"/> Freestyle			
<input type="checkbox"/> Team			
<input checked="" type="checkbox"/> Low Wind			

SCHNUR

20 - 40 kp	20 - 25 m
40 - 80 lbs	65 - 80 ft

ABMESSUNGEN

	cm	inch	SPEED
115	45,3		
	51	20,1	POWER
	g	oz	
85	3		

HINTS & TIPPS

SAIL MATERIAL

Ripstop-Polyester

INCLUDED ACCESSORIES

HQ Sportkites Quiver
Flyinglines: Dyneema 25kp, 2x 25m on winder
Flyingstraps

PRODUCT INTRODUCTION

PRODUCT CLEARING

Januar 2013

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
	Spine	ø3 mm Solid Carbon Rod	1	487
	Upper Spreader	ø3 mm Solid Carbon Rod	1	276
	Lower Spreader	ø3 mm Solid Carbon Rod	1	750
	Leadingedge	ø3 mm Solid Carbon Rod	2	750
	Standoff	ø2 mm Solid Fiberglas Rod	2	154

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
144300	Leadingedge/Spine	HQ Endcap, moulded, ø3 mm	4
153403	Leadingedge	HQ LE-Connector ø3 mm straight	4
153414	Lower Spreader	HQ Stand Off Connector small (2,5 - 4 mm)	2
153460	Center-T	Rubber Ring ø6/4 mm	1
153630	Lower LE	HQ Split Nock ø3 mm	2
153491	Leadingedge/ lower spreader	C-Clip 3 mm	8
153418	Trailingedge	Stand Off Clip, screwed ø2.5 mm	2