


27.04.2021 16:20:16

BRIDLE

OBSESSION_99

116720

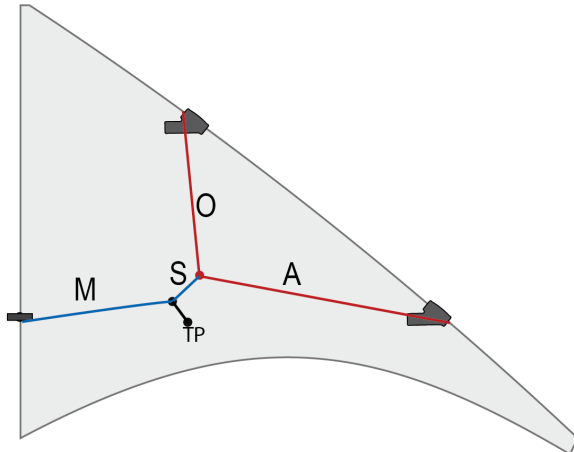

O = 43 cm , M = 65 cm , A = 61 cm , S = 27 cm

MATERIAL
96 kp corded Dyneema



INFOS

CATEGORY

- Beginne
- Advance
- Master
- Allroun
- Trick
- Traction
- Precision
- Freestyl
- Tea
- Low

WIND RANGE

6 - 40 KM/H
4 - 25 MPH
2 - 6 BFT.
3 - 22 KNOT.

OPT. WIND


15 KM/H
9 MPH
3 BFT.
8 KNOT.

FLYING LINE

25 - 70 kp 10 - 20 m
50 - 150lbs 30 - 65 ft

DIMENSIONS

	cm	inch
	196	77,2
	100	39,4
	280 g	9,9 oz



HINTS & TIPPS

Your new Obsession is a stunt kite which manages not only radical stunts, but also "soft" moves. The strongly curved wing tips mean that it is very easy to start belly and back stunts and the "turbo" bridle makes the kite easy to control and adjust. The wing tips are curved with solid carbon fibre rods which are extremely elastic.

SAIL MATERIAL

VENTEX Ripstop Polyester

INCLUDED

PRODUCT INTRODUCTION — PRODUCT CLEARING

Januar 1999

FRAME

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#	LENGTH
a60050	upp. spreader	5,9 mm carbontube Avia .2300	1	50
a60075	Spine	5,9 mm carbontube Avia .2300	1	72,5
a60075	low. spreader	5,9 mm carbontube Avia .2300	2	72,5
a60100	upper LE	5,9 mm carbontube Avia .2300	2	96,0
a39082	lower LE	Microcarbon rod 4mm Avia	2	45,0
130105	outer standoff	fiberglas rod, 2,1mm	2	21,5
a30100	inner standoff	Microcarbon AVIA .125	2	24,5

PARTS

ITEM NUM.	MOUNTING POSITION	ITEM NAME	#
153407	Upper Leading Edge	HQ Connector 5,9 mm	2
153407	Lower Leading Edge	HQ Connector 5,9 mm	2
153640	Wingtip	HQ nock 4 mm	2
160060	Center T	center tee 6 mm Exel	1
150660	Spinetip	vinil tube 6/3 25 mm long	1
153416	Standoff/Spreader	HQ standoff connector 5,5 - 6,3 mm	4
153413	Standoff/Sail	HQ standoff clip 3 mm	2
153410	Standoff/Sail	HQ standoff clip 2 mm	2
153490	Spine/Upper Spreader	rubber ring 10/4 mm	1
135914	Leading Edge Ferulle	Avia alu ferulle .2300	2
135100	Leading Edge Ferulle	plug in Skinny/4mm (FSD)	2
135979	Plugs lo.spreader /	reinforcement fiberglas Avia .2300 10 cm	4